

# Distributor cabinet

according DIN 43870 bdeW guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder inside)

## contains the following items:


- 4-pole busbar system 30x5mm
- 2x NH2 vertical fuse switch disconnectors
- 6x NH00 vertical fuse switch disconnectors
- protection cover against accidental contact
- cable clamp rail in the cabinet

## optional:

- filling material for socket SFM0
- dual swing handle
- RAL-painting on the outside

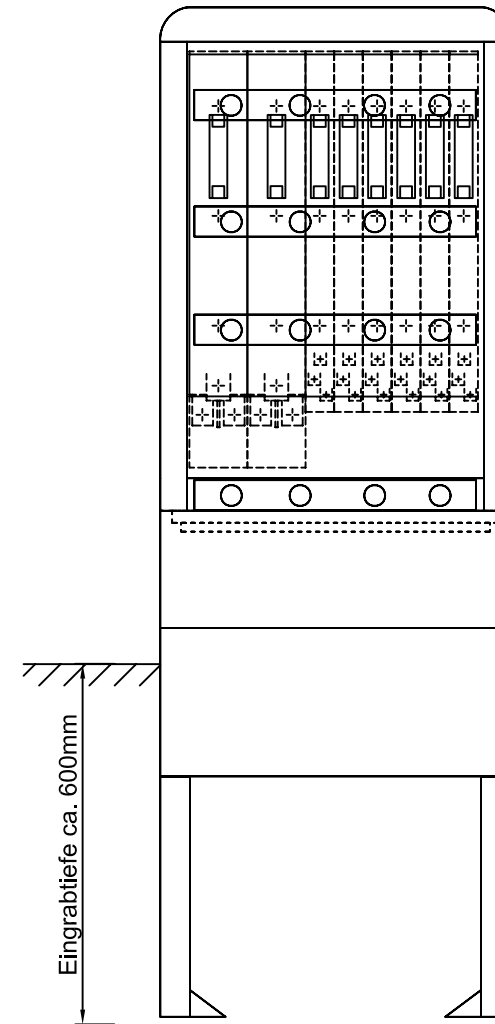

Type of cabinet:  
 GSAB 0S850  
 H: 850+950  
 W: 590  
 D: 320

|  |  |  |  |        |            |   |                        |  |                                  |  |
|--|--|--|--|--------|------------|---|------------------------|--|----------------------------------|--|
|  |  |  |  | date   | 05.12.2013 | Project: Kabelverteiler<br>Best.Nr.:0S850K-2LSL2+6LSL00 | Ang.-Nr.:<br>Auf.-Nr.: |  <b>GSAB</b><br>Elektrotechnik GmbH | =                                |  |
|  |  |  |  | name   | M.Biermann |   |                        |  |                                  | +  |
|  |  |  |  | Urspr. |            | Ers.f.  | Ers.d.                 |  | Lindenstraße 23<br>99718 Greußen | Tel: 49/03636/7614-76<br>Fax: 49/03636/7614-30 |
|  |  |  |  |        |            |   |                        |  | Bl. 1 v.<br>1 Bl.                |  |