

Distributor cabinet

according DIN 43870 bdew guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle
 (with profile cylinder inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 2x NH2 vertical fuse switch disconnector
- protection cover against accidental contact
- reserve places
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM0
- dual swing handle
- RAL-painting on the outside

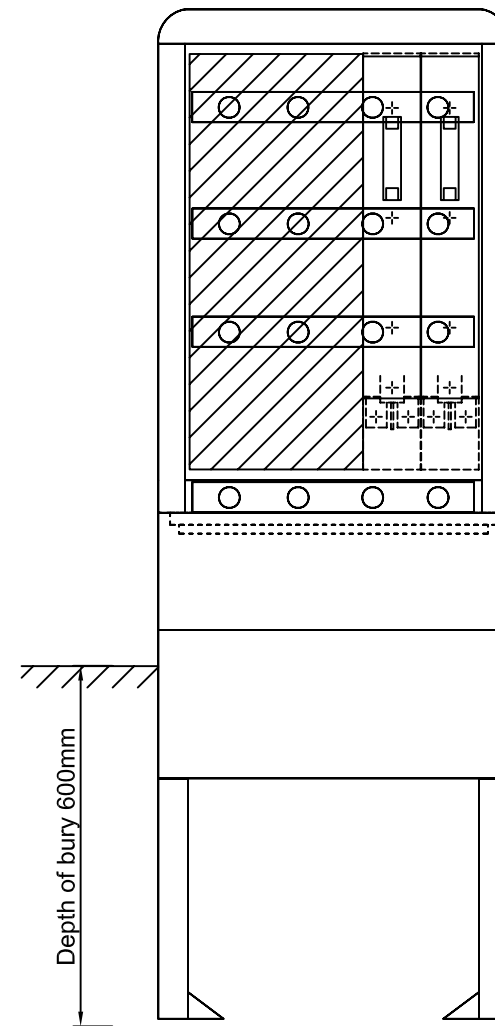

Type of cabinet:
 GSAB 0S850
 H: 850+950
 W: 590
 D: 320

			Datum	05.12.2013	Projek: Kabelverteiler	Ang.-Nr.:	=		
			Bearb.	M.Biermann					Best.Nr.:0S850K-2LSL2
			Urspr.		Ers.f.	Ers.d.	Lindenstraße 23	Tel: 49/03636/7614-76	Bl. 1 v.
							99718 Greußen	Fax: 49/03636/7614-30	1 Bl.



GSAB
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.
 99718 Greußen Fax: 49/03636/7614-30 1 Bl.