

# Distributor cabinet

according DIN 43870 bdew guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder inside)

## contains the following items:


- 4-pole busbar system 30x5mm
- 3x NH2 vertical fuse switch disconnecter
- 4x NH00 vertical fuse switch disconnecter
- protection cover against accidental contact
- cable clamp rail in the cabinet

## optional:

- filling material for socket SFM0
- dual swing handle
- RAL-painting on the outside

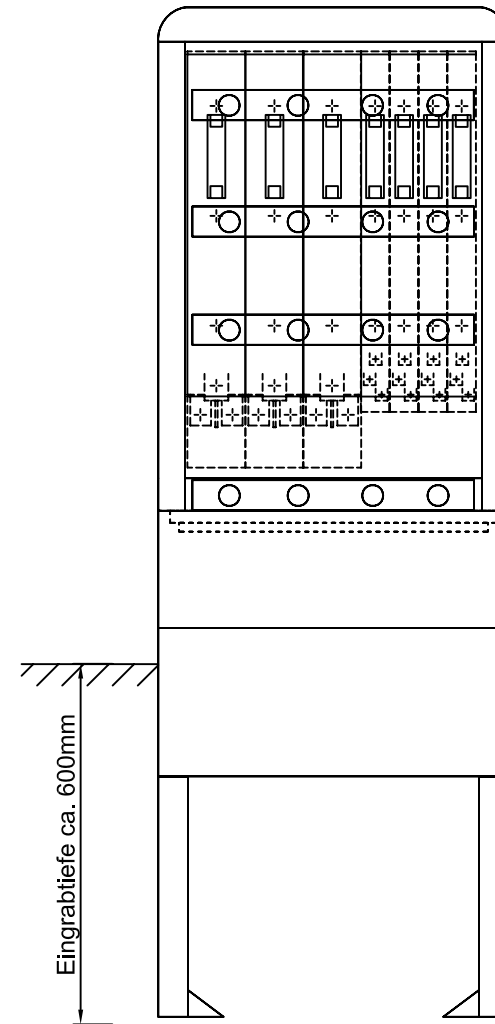

Type of cabinet:  
 GSAB 0S850  
 H: 850+950  
 W: 590  
 D: 320

|  |  |  |  |      |            |   |                        |  |                 |                       |          |
|--|--|--|--|------|------------|---|------------------------|--|-----------------|-----------------------|----------|
|  |  |  |  | date | 05.12.2013 | Project: Kabelverteiler<br>Best.Nr.:0S850K-3LSL2+4LSL00 | Ang.-Nr.:<br>Auf.-Nr.: |  <b>GSAB</b><br>Elektrotechnik GmbH | =               |                       |          |
|  |  |  |  | name | M.Biermann |   |                        |  | Urspr.          | Ers.f.                | Ers.d.   |
|  |  |  |  |      |            |   |                        |  | Lindenstraße 23 | Tel: 49/03636/7614-76 | Bl. 1 v. |
|  |  |  |  |      |            |   |                        |  | 99718 Greußen   | Fax: 49/03636/7614-30 | 1 Bl.    |