

# Distributor cabinet

according DIN 43870 bdew guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder inside)

## contains the following items:

- 4-pole busbar system 30x5mm
- 4x NH00 vertical fuse switch disconnecter
- protection cover against accidental contact
- reserve places
- cable clamp rail in the cabinet

## optional:

- filling material for base SFM0
- dual swing handle
- RAL-painting on the outside

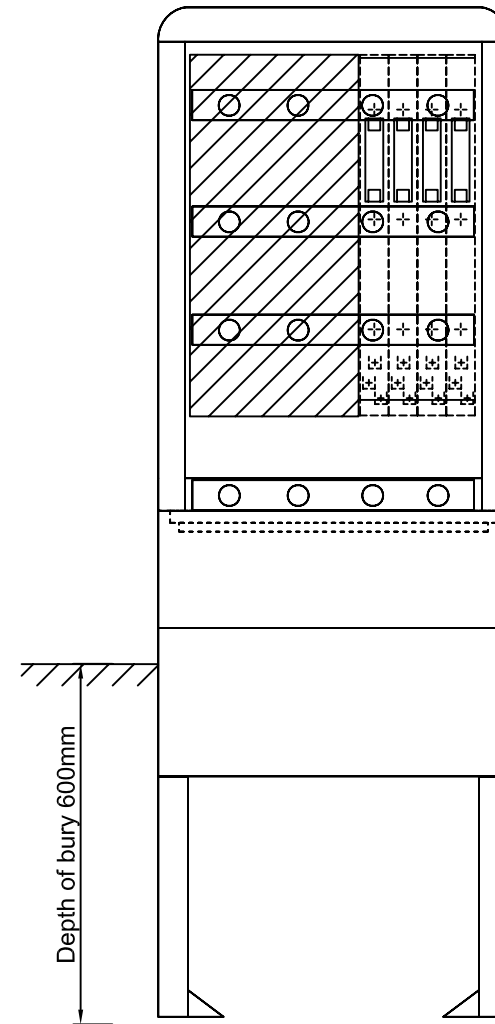

Type of cabinet:  
 GSAB 0S850  
 H: 850+950  
 W: 590  
 D: 320

			Datum	05.12.2013	Project: Distributor cabinet	Ang.-Nr.:	=		
			Bearb.	M.Biermann					Best.Nr.:0S850K-4LSL00
			Urspr.		Ers.f.	Ers.d.	Lindenstraße 23	Tel: 49/03636/7614-76	Bl. 1 v.
							99718 Greußen	Fax: 49/03636/7614-30	1 Bl.



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.  
 99718 Greußen Fax: 49/03636/7614-30 1 Bl.