

Distributor cabinet

according DIN 43870 bdew guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle
 (with profile cylinder inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 4x NH2 vertical fuse switch disconnecter
- 2x NH00 vertical fuse switch disconnecter
- protection cover against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for base SFM0
- dual swing handle
- RAL-painting on the outside

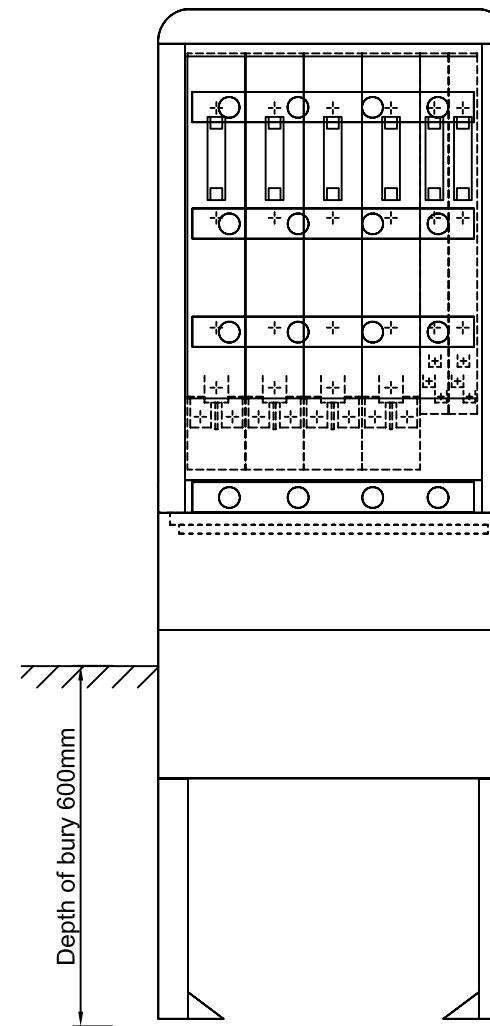

Type of cabinet:
 GSAB 0S850
 H: 850+950
 W: 590
 D: 320

| | | | | | |
|--|--|--------|------------|-----------------------------|-----------|
| | | date | 05.12.2013 | Projek: Distributor cabinet | Ang.-Nr.: |
| | | name | M.Biermann | | |
| | | Urspr. | | Ers.f. | Ers.d. |



GSAB
 Elektrotechnik GmbH

| | | | |
|-----------------|-----------------------|-------|-----|
| | | = | |
| | | + | |
| Lindenstraße 23 | Tel: 49/03636/7614-76 | Bl. 1 | v. |
| 99718 Greußen | Fax: 49/03636/7614-30 | 1 | Bl. |