

distributor cabinet

according DIN 43870 bdew-guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey , similar to RAL 7035
 lock: single swing handle
 (with Euro profile half cylinder lock inside)

contains the following items:

- 4-pole busbar system 30x10mm
- 3xNH2-vertical disconnection fuse
 (press/insert nut M12, 3x1 pin to switch)
- 4x100mm reserve place
- 1x50mm reserve place
- cover protection against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM1
- cable inlet in the base
- RAL-painting on the outside

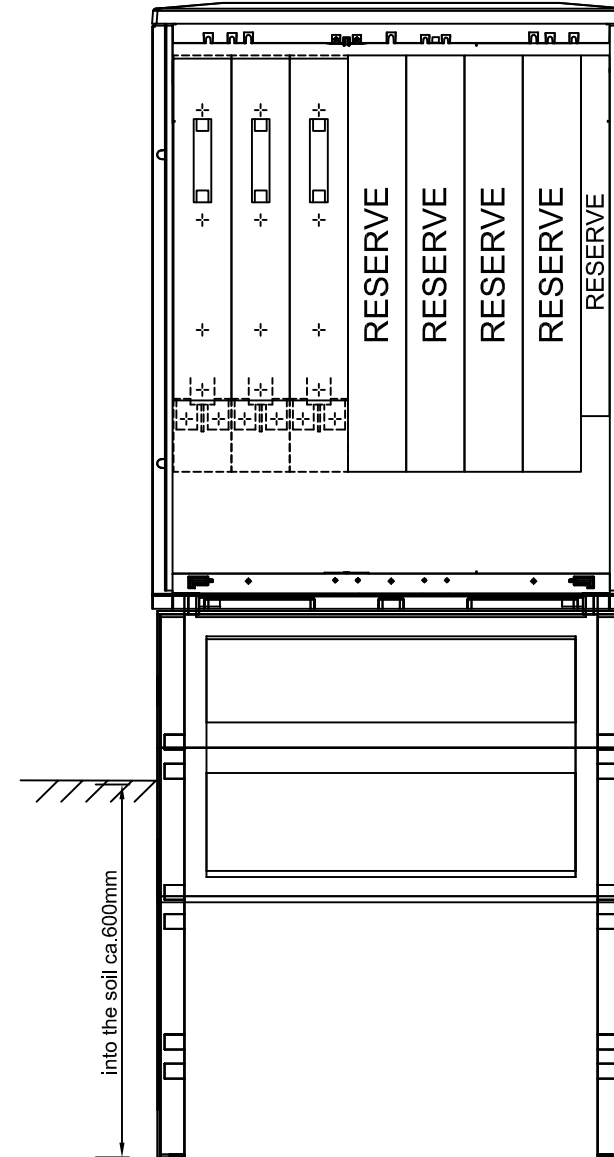

typ of cabinet:
 GSAB 1S1000
 H : 1020+950
 W: 805
 D : 320

			Datum	26.01.2012	project: distributor cabinet order-no: 1S1000K3LSL2	Ang.-Nr.:	
			Bearb.	T.Prinz		Datenblatt	
			Gepr.				
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.



GSAB
 Elektrotechnik GmbH

Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.
----------------------------------	--	-------------------