

# distributor cabinet

according DIN 43870 bdew-guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44  
 class of protection II ( with electrical insulation )  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey , similar to RAL 7035  
 lock: single swing handle  
 (with Euro profile half cylinder lock inside)

## contains the following items:

- 4-pole busbar system 30x10mm
- 4xNH2-vertical disconnection fuse  
 (press/insert nut M12, 3x1 pin to switch)
- 3x100mm reserve place
- 1x50mm reserve place
- cover protection against accidental contact
- cable clamp rail in the cabinet

## optional:

- filling material for socket SFM1
- cable inlet in the base
- RAL-painting on the outside

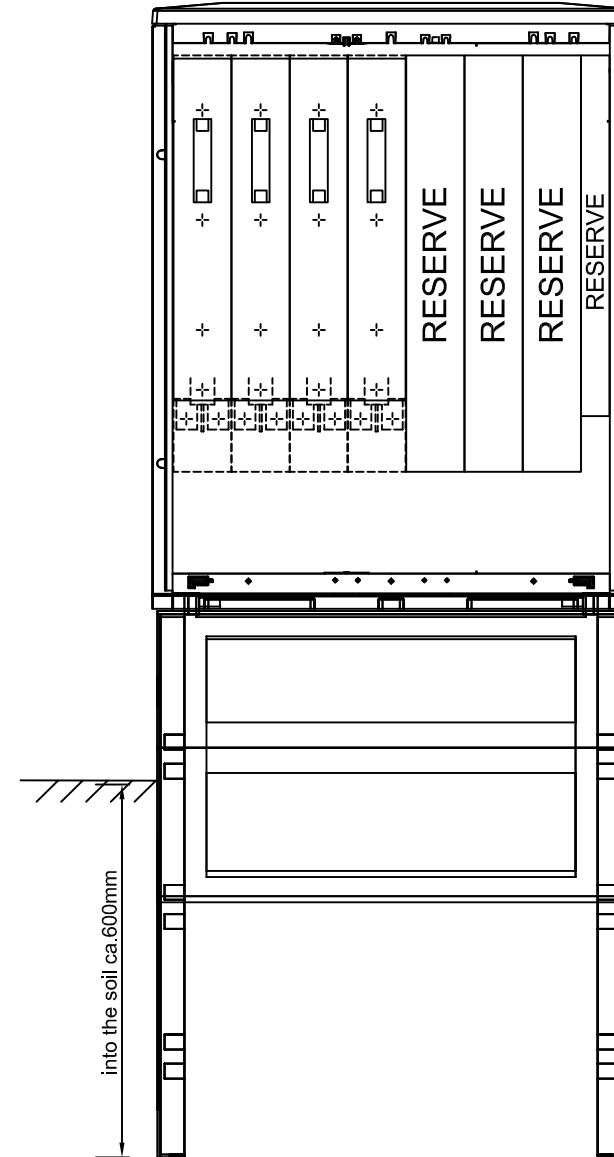

typ of cabinet:  
 GSAB 1S1000  
 H : 1020+950  
 W: 805  
 D : 320

			Datum	26.01.2012	project: distributor cabinet order-no: 1S1000K4LSL2	Ang.-Nr.: Datenblatt
			Bearb.	T.Prinz		
			Gepr.			
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.
----------------------------------	--	-------------------