

# Distributor cabinet

according DIN 43870 bdew guideline 2008  
 inspected according VDE 0660 part 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder inside)

contains the following items:

- 4-pole busbar system tin -platet

optional:

- filling material for base SFM1
- dual swing handle
- RAL-painting on the outside

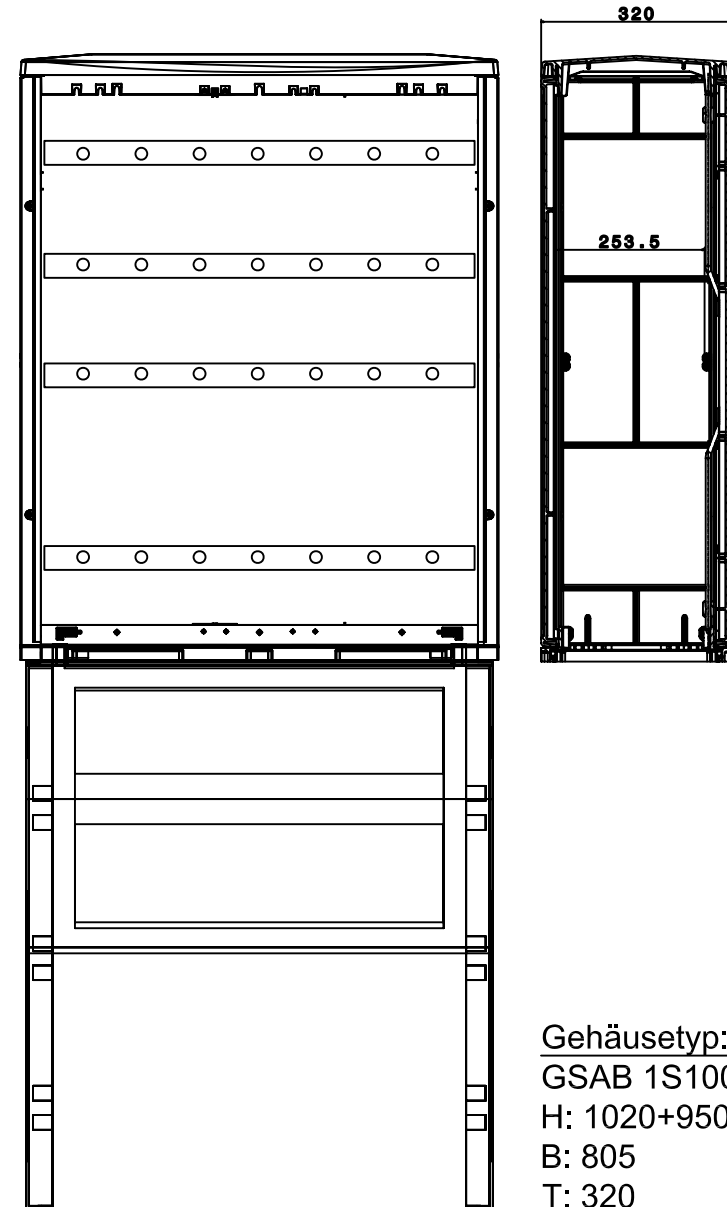

Gehäusetyp:  
 GSAB 1S1000  
 H: 1020+950  
 B: 805  
 T: 320

			Datum	02.01.2013	Project: <b>empty cabinet</b> Order-Nr: <b>1S1000Kz</b>	Ang.-Nr.:		=
			Bearb.	M.Biermann		Auf.-Nr.:		+
			Gepr.					
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.	
								Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v. 99718 Greußen Fax: 49/03636/7614-30 1 Bl.



**GSAB**  
 Elektrotechnik GmbH