

distribution cabinet special depth 470mm

usable depth on the closure: 403mm

inspected according VDE 0660 Teil 500 / IEC 439-1

inspected by TÜV according DIN EN 60439-5

protection class of cabinet: IP 44

class of protection II (with electrical insulation)

made of: fibreglass-reinforced polyester
(SMC process), IEC-695-2-1, halogen-free


colour: grey, similar to RAL 7035


closure: single swing handle - (with cylinder)

optional:

- with double swing handle
- with mounting plate PVC 6mm
or galvanized steel sheet
- protection class IP 54
- painting in RAL

appropriate base: 1NSE

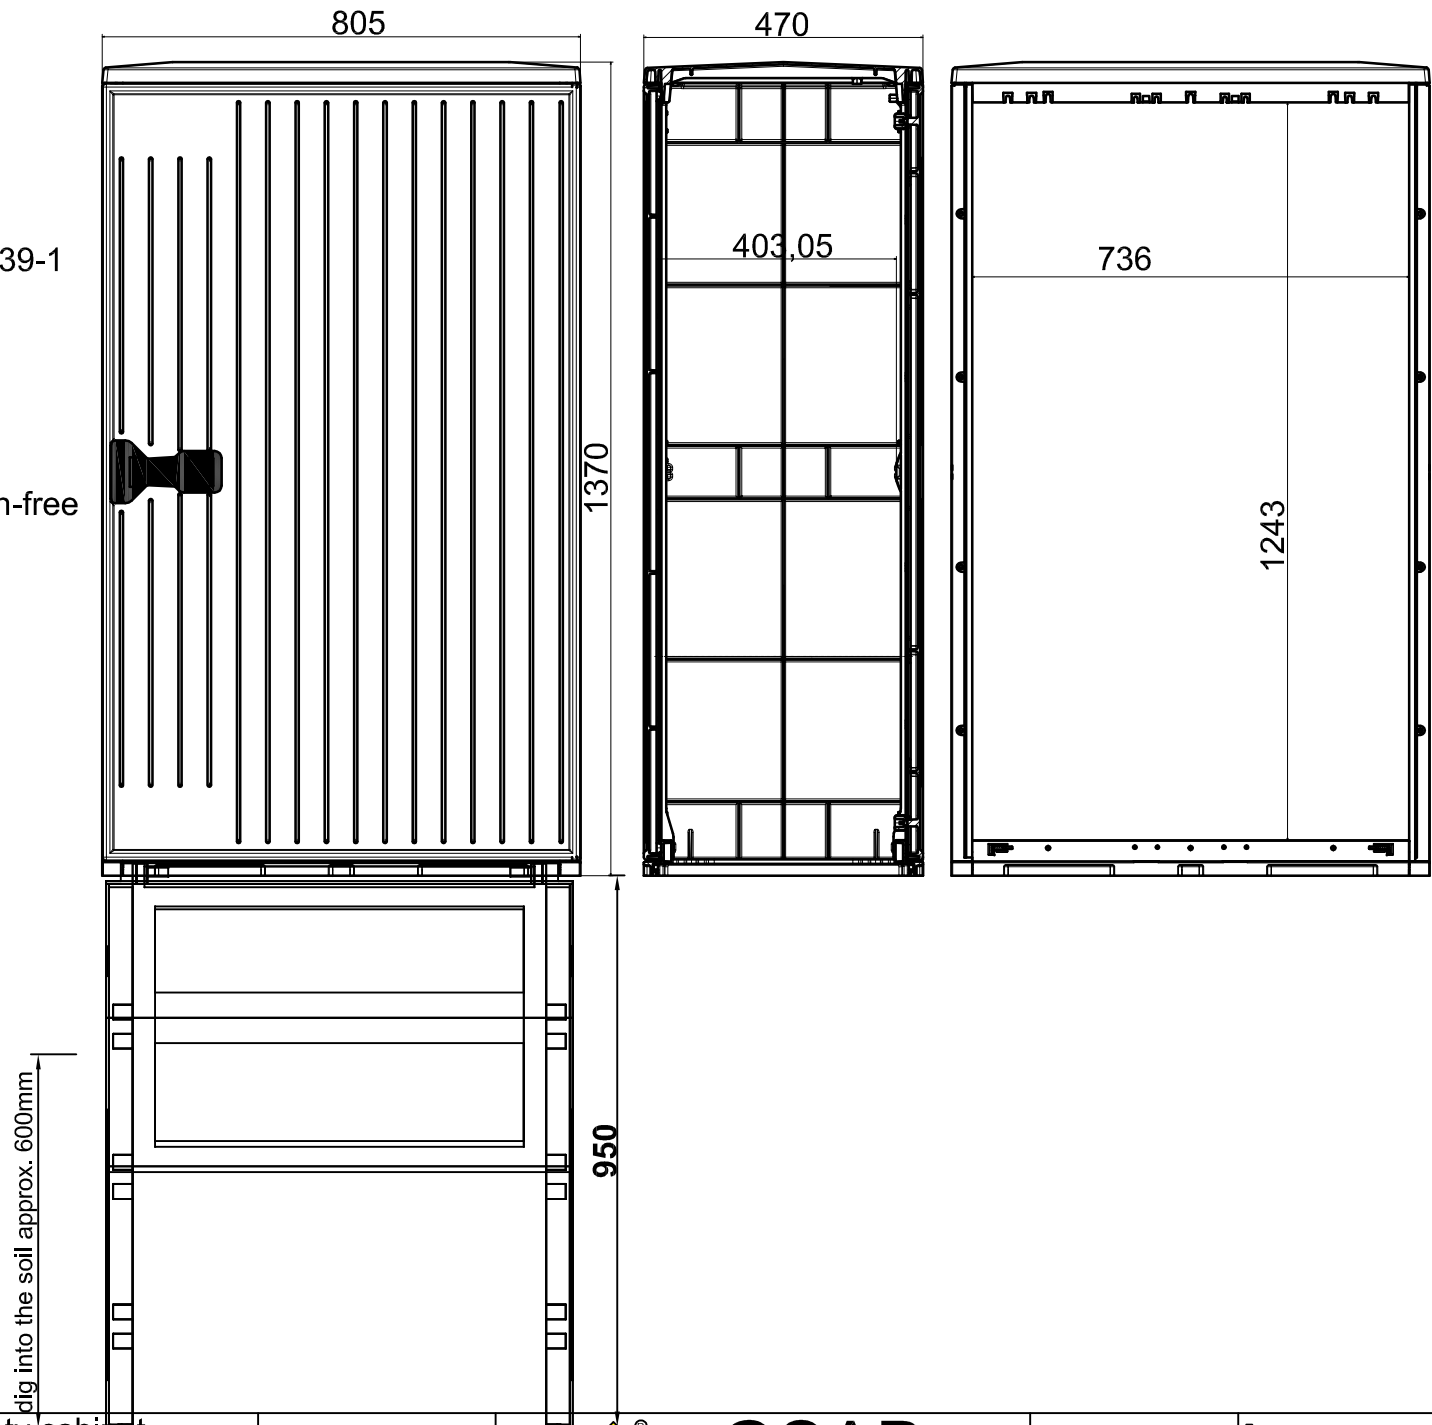

			Datum	07.04.2012	project: empty cabinet order-no: 1S1300-470	Ang.-Nr.:		 GSAB Elektrotechnik GmbH	=	
			Bearb.	H.Vonnoe		Auf.-Nr.:			+	
Zust.	Anderung	Datum	Name	Norm		Urspr.	Ers.f.		Ers.d.	Lindenstraße 23 99718 Greußen