

# Distributor cabinet

according DIN 43870 bdew guideline 2008  
 inspected according VDE 0660 part 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 12x NH00 vertical fuse switch disconnector
- protection cover against accidental contact
- reserve places
- cable clamp rail in the cabinet

optional:

- filling material for base SFM1
- dual swing handle
- RAL-painting on the outside

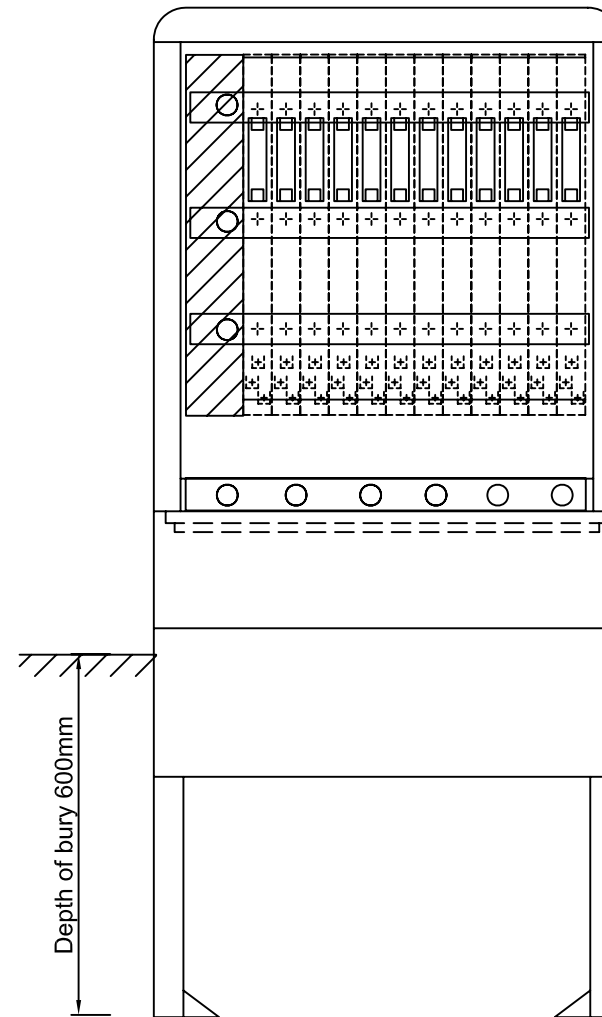

Type of cabinet:  
**GSAB 1S850**  
 H: 850+950  
 W: 785  
 D: 320

|  |  |  |        |            |                     |           |   |                 |                       |                |     |
|--|--|--|--------|------------|---------------------|-----------|---|-----------------|-----------------------|----------------|-----|
|  |  |  | Datum  | 06.12.2013 | Distributor cabinet | Ang.-Nr.: | = |                 |                       |                |     |
|  |  |  | Bearb. | M.Biermann |                     |           |   |                 | Best.Nr.:             | 1S850K-12LSL00 | +   |
|  |  |  | Urspr. |            | Ers.f.              | Ers.d.    |   | Lindenstraße 23 | Tel: 49/03636/7614-76 | Bl. 1          | v.  |
|  |  |  |        |            |                     |           |   | 99718 Greußen   | Fax: 49/03636/7614-30 | 1              | Bl. |



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.  
 99718 Greußen Fax: 49/03636/7614-30 1 Bl.