

Distributor cabinet

according DIN 43870 bdew guideline 2008
 inspected according VDE 0660 part 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle
 (with profile cylinder inside)

contains the following items:


- 4-pole busbar system 30x5mm
- 2x NH2 vertical fuse switch disconnecter
- 10x NH00 vertical fuse switch disconnecter
- protection cover against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for base SFM1
- dual swing handle
- RAL-painting on the outside

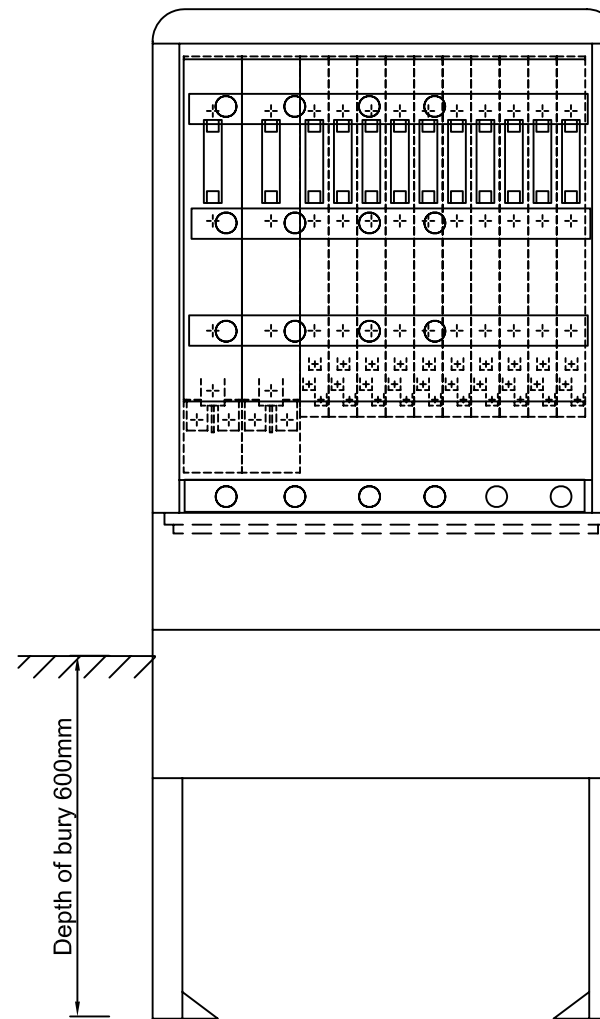

Type of cabinet:
GSAB 1S850
 H: 850+950
 W: 785
 D: 320

				date	05.12.2013	Project: Distributor cabinet Best.Nr.:1S850K2LSL2-10LSL00	Ang.-Nr.: Auf.-Nr.:	 GSAB Elektrotechnik GmbH	=		
				name	M.Biermann					+	
				Urspr.		Ers.f.	Ers.d.		Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.