# Distributor cabinet

according DIN 43870 bdew guideline 2008
inspected according VDE 0660 part 500 / IEC 439-1
inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP44
class of protection II (with electrical insulation)
made of : fibreglass-reinforced polyester
(SMC process), IEC-695-2-1, halogen-free
colour : grey, similar to RAL 7035
lock: single swing handle
(with profile cylinder inside)

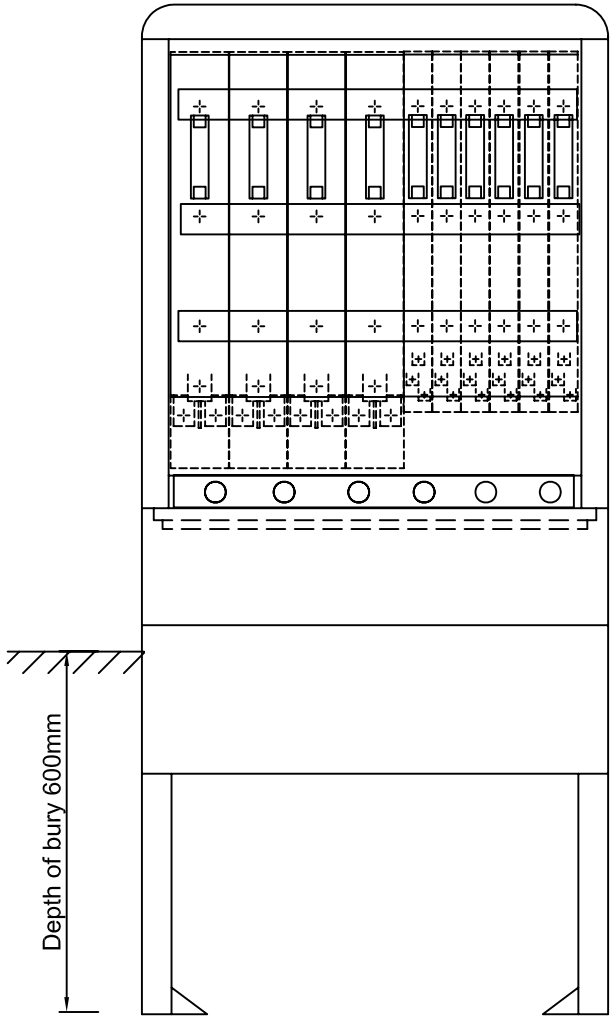


Type of cabinet:
GSAB 1S850
H: 850+950
W: 785
D: 320

contains the following items:

- 4-pole busbar system 30x5mm
- 4x NH2 vertical fuse switch disconnector
- 6x NH00 vertical fuse switch disconnector
- protection cover against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for base SFM1
- dual swing handle
- RAL-painting on the outside

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | date | 06.12.2013 | Project: Distributor cabinet | Ang.-Nr.: | GSAB | | = |
| | | | | name | M.Biermann | **Best.Nr.:1S850K4LSL2-6LSL00** | Auf.-Nr.: | Elektrotechnik GmbH | | + |
| | | | | | | Urspr. / Ers.f. | Ers.d. | Lindenstraße 23 99718 Greußen | Tel: 49/03636/7614-76 Fax: 49/03636/7614-30 | Bl. 1 v. 1 Bl. |