

Distributor cabinet

according DIN 43870 bdew guideline 2008
 inspected according VDE 0660 part 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle
 (with profile cylinder inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 1x NH2 vertical fuse switch disconnecter
- protection cover against accidental contact
- reserve places
- cable clamp rail in the cabinet

optional:

- filling material for base SFM1
- dual swing handle
- RAL-painting on the outside

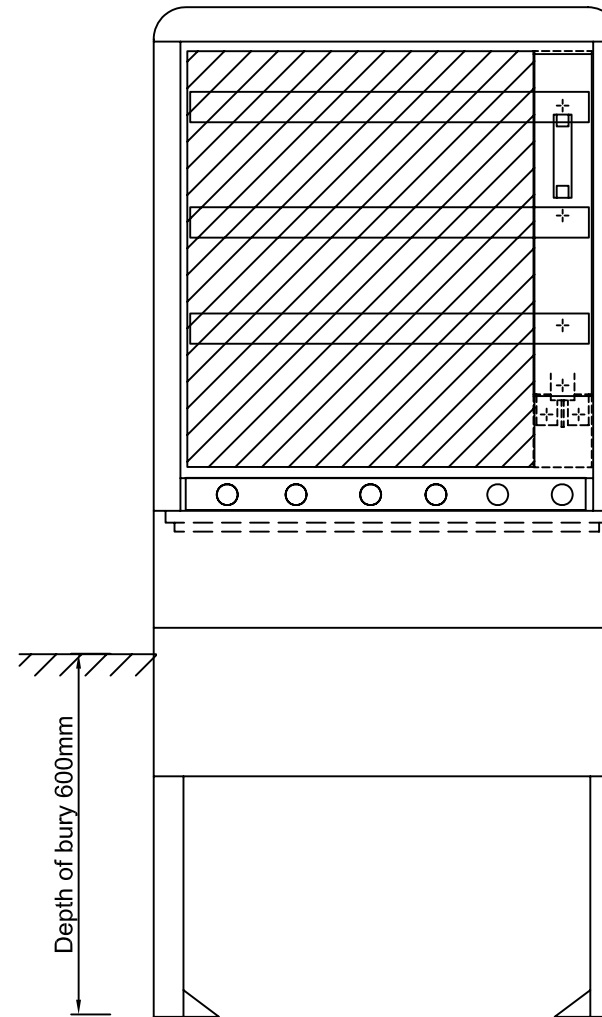

Type of cabinet:
GSAB 1S850
 H: 850+950
 W: 785
 D: 320

| | | | | | | | | | | |
|--|--|--|--|--------|------------|------------------------------|-----------|----------------------------------|--|-------------------|
| | | | | date | 06.12.2013 | Project: Distributor cabinet | Ang.-Nr.: | = | | |
| | | | | name | M.Biermann | | | | Best.Nr.: 1S850K-1LSL2 | Auf.-Nr.: |
| | | | | Urspr. | | Ers.f. | Ers.d. | Lindenstraße 23 99718 Greußen | Tel: 49/03636/7614-76 Fax: 49/03636/7614-30 | Bl. 1 v. 1 Bl. |



GSAB
 Elektrotechnik GmbH