

# Empty enclosure with special depth (470mm)

with mounting plate

usable internal depth at lock 402mm

Type: **GSAB 2S1000-470M**

tested according to VDE 0660 part 500 / IEC 439-1

tested by TÜV according to DIN EN 60439-5

Protection of the column: IP 44

Protection Class II (double insulated)

Material: fiberglass reinforced polyester

Color: grey, similar to RAL 7035

Closure: single swing handle



(with built-in profile cylinder)


double swing handle available for extra cost

## optional:

- with mounting plate (assembled)
- with fixation for doors
- separate lockable doors
- version with 1/3-2/3-doors
- protection: IP54
- painting in RAL colors

**matching groundbase: 2NS470 or 2NS470-B**

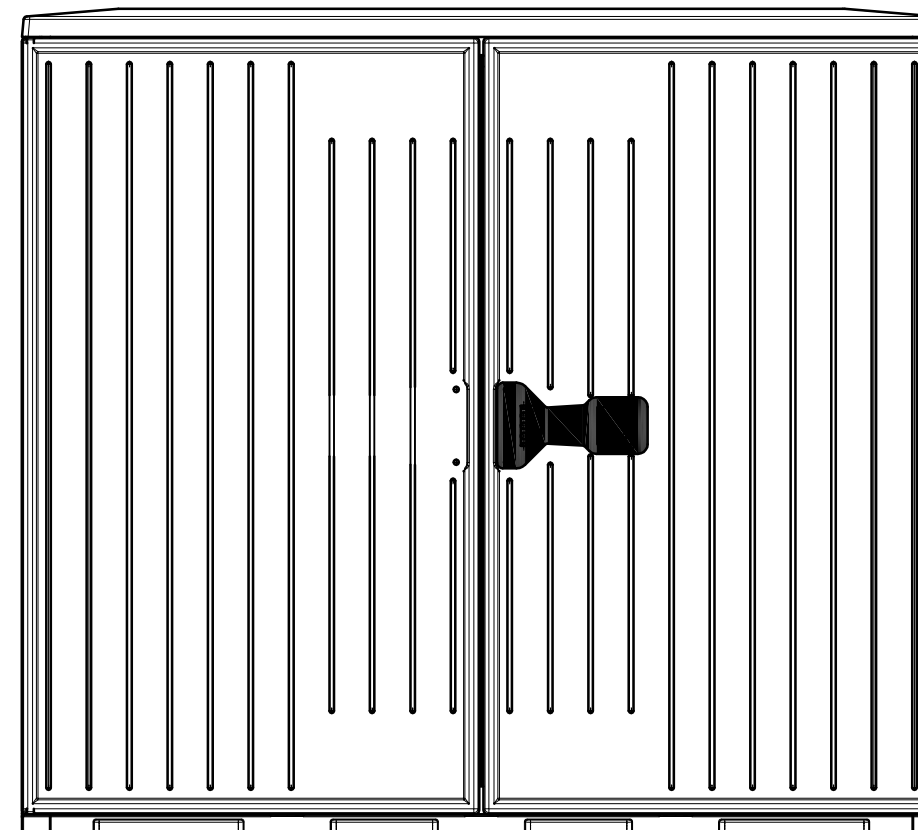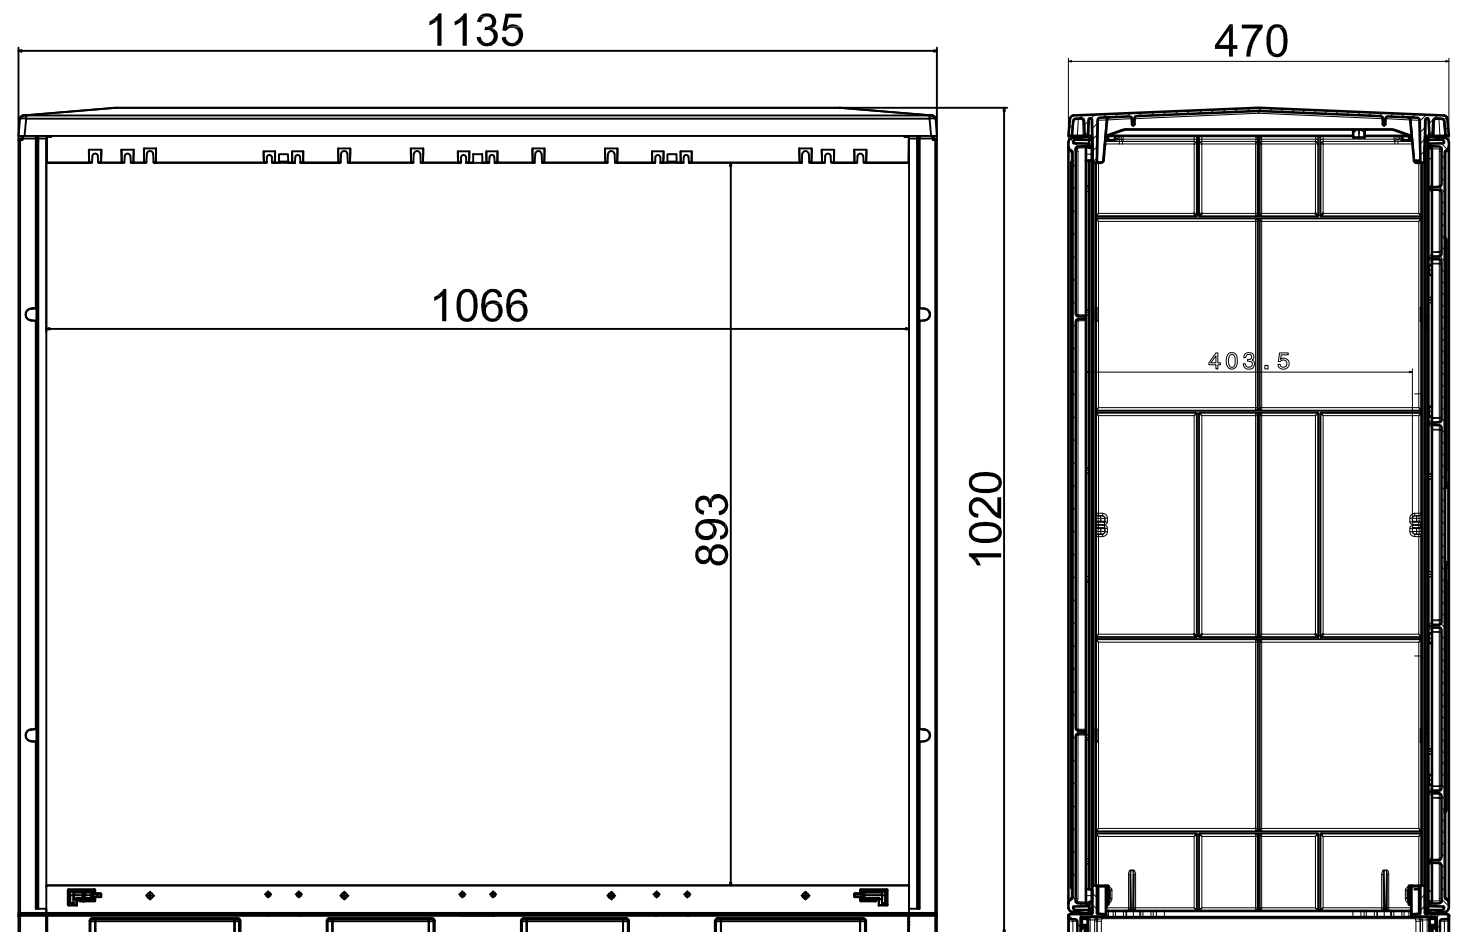

				Datum	19.07.2012	Project: empty enclosure <b>order-no: 2S1000-470M</b>	Ang.-Nr.:	 <b>GSAB</b> Elektrotechnik GmbH		=	
				Bearb.	H.Vonnoe		Auf.-Nr.:			+	
Zust.	Anderung	Datum	Name	Norm		Urspr.	Ers.f.	Ers.d.	Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.