Distributor cabinet

according DIN 43870 bdew guideline 2008
inspected according VDE 0660 part 500 / IEC 439-1
inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP44
class of protection II (with electrical insulation)
made of : fibreglass-reinforced polyester
(SMC process), IEC-695-2-1, halogen-free
colour : grey, similar to RAL 7035
lock: single swing handle
(with profile cylinder lock inside)

<u>contains the following items:</u>

- 4-pole busbar system 30x10mm
- 2x NH2 vertical fuse switch disconnector
  (press / insert nut M12, 3x1pin to switch)
- protection cover against accidental contact
- reserve places (8x100mm + 1x50mm)

<u>optional:</u>

- filling material for base SFM1
- cable slot in the base
- RAL-painting on the outside

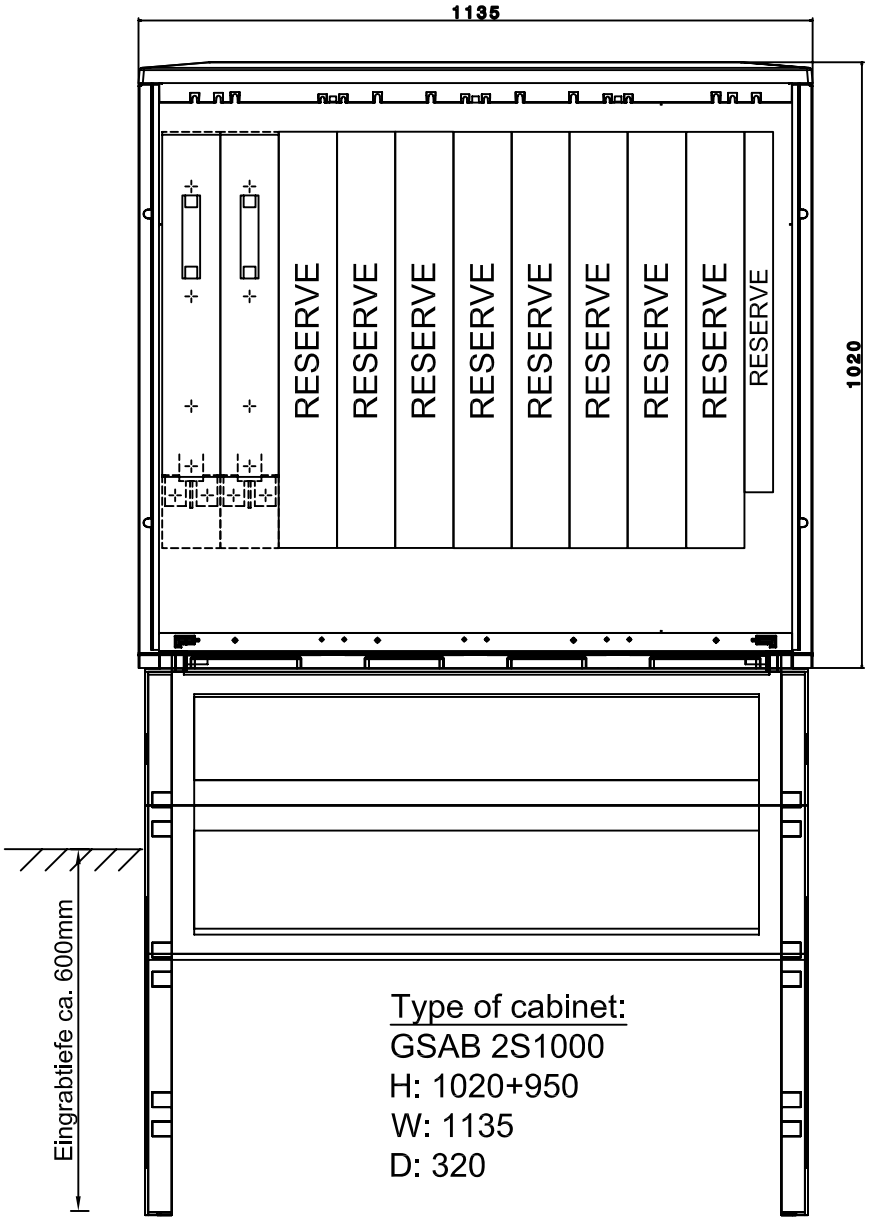

Type of cabinet:
GSAB 2S1000
H: 1020+950
W: 1135
D: 320

				Datum	10.12.2013	**Project:** Distributor cabinet	Ang.-Nr.:	GSAB Elektrotechnik GmbH	=
				Bearb.	M.Biermann	**Bst.Nr.:2S1000K2LSL2**	Datenblatt		+
						Urspr. / Ers.f.	Ers.d.	Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.