

Distributor cabinet

according DIN 43870 bdeu guideline 2008
 inspected according VDE 0660 part 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle
 (with profile cylinder lock inside)


contains the following items:

- 4-pole busbar system 30x10mm
- 3x NH2 vertical fuse switch disconnecter
 (press / insert nut M12, 3x1pin to switch)
- protection cover against accidental contact
- reserve places (7x100mm + 1x50mm)

optional:

- filling material for base SFM1
- cable slot in the base
- RAL-painting on the outside

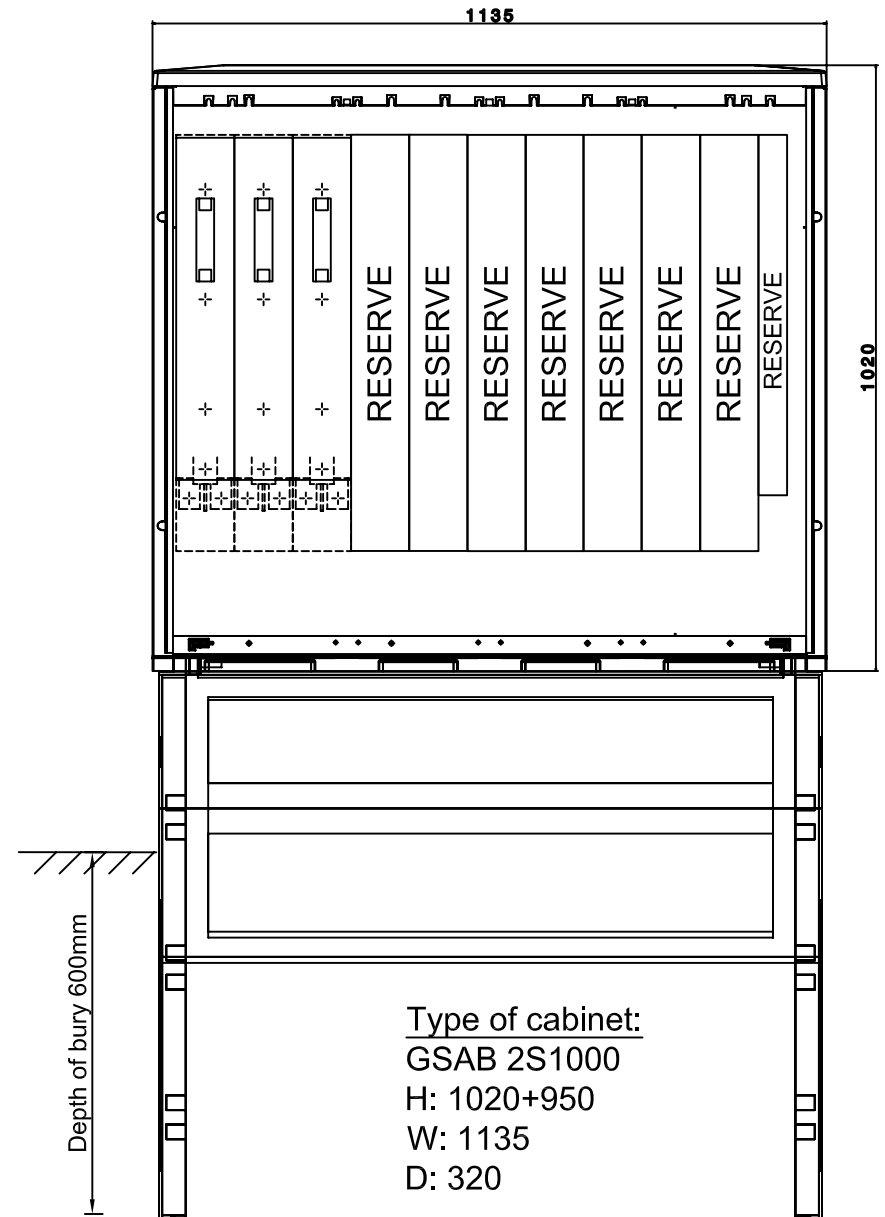

			Datum	10.12.2013	Project: Distributor cabinet Bst.Nr.:2S1000K3LSL2	Ang.-Nr.: Datenblatt	 GSAB Elektrotechnik GmbH	Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.
		Bearb.	M.Biermann							
		Gepr.								
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.			