

# Distributor cabinet

according DIN 43870 bdeu guideline 2008  
 inspected according VDE 0660 part 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder lock inside)

## contains the following items:

- 4-pole busbar system 30x10mm
- 7x NH2 vertical fuse switch disconnecter  
 (press / insert nut M12, 3x1pin to switch)
- protection cover against accidental contact
- reserve places (3x100mm + 1x50mm)

## optional:

- filling material for base SFM1
- cable slot in the base
- RAL-painting on the outside

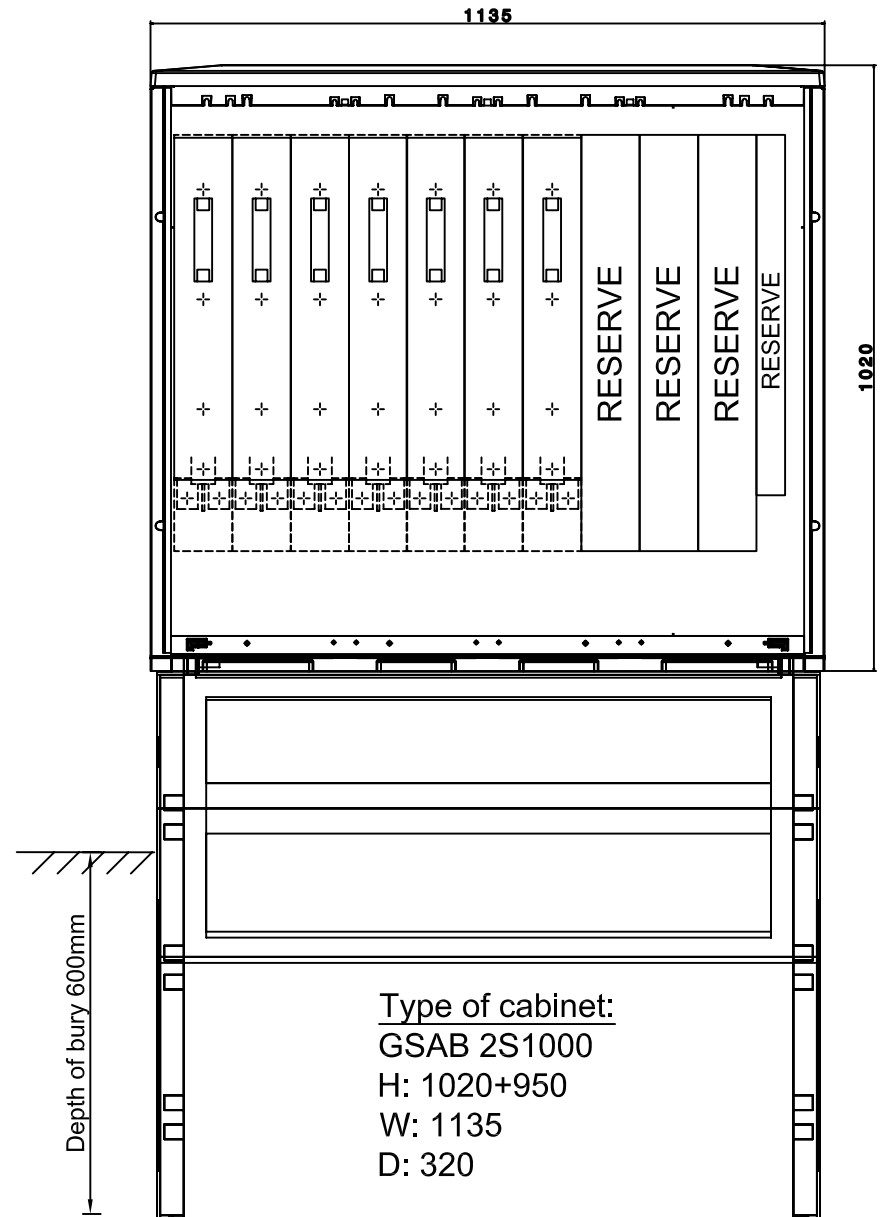

Datum	11.12.2013
Bearb.	M.Biermann

Project: Distributor cabinet		
Bst.Nr.: 2S1000K7LSL2		
Urspr.	Ers.f.	Ers.d.



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.
----------------------------------	------------------------------------------------	-------------------