

# Distributor cabinet

according DIN 43870 bdeu guideline 2008  
 inspected according VDE 0660 part 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle  
 (with profile cylinder lock inside)

## contains the following items:

- 4-pole busbar system
- 1x NH2 vertical fuse switch disconnecter  
 (press / insert nut M12, 3x1pin to switch)
- protection cover against accidental contact
- reserve places (9x100mm + 1x50mm)

## optional:

- filling material for base SFM2
- cable slot in the base
- RAL-painting on the outside

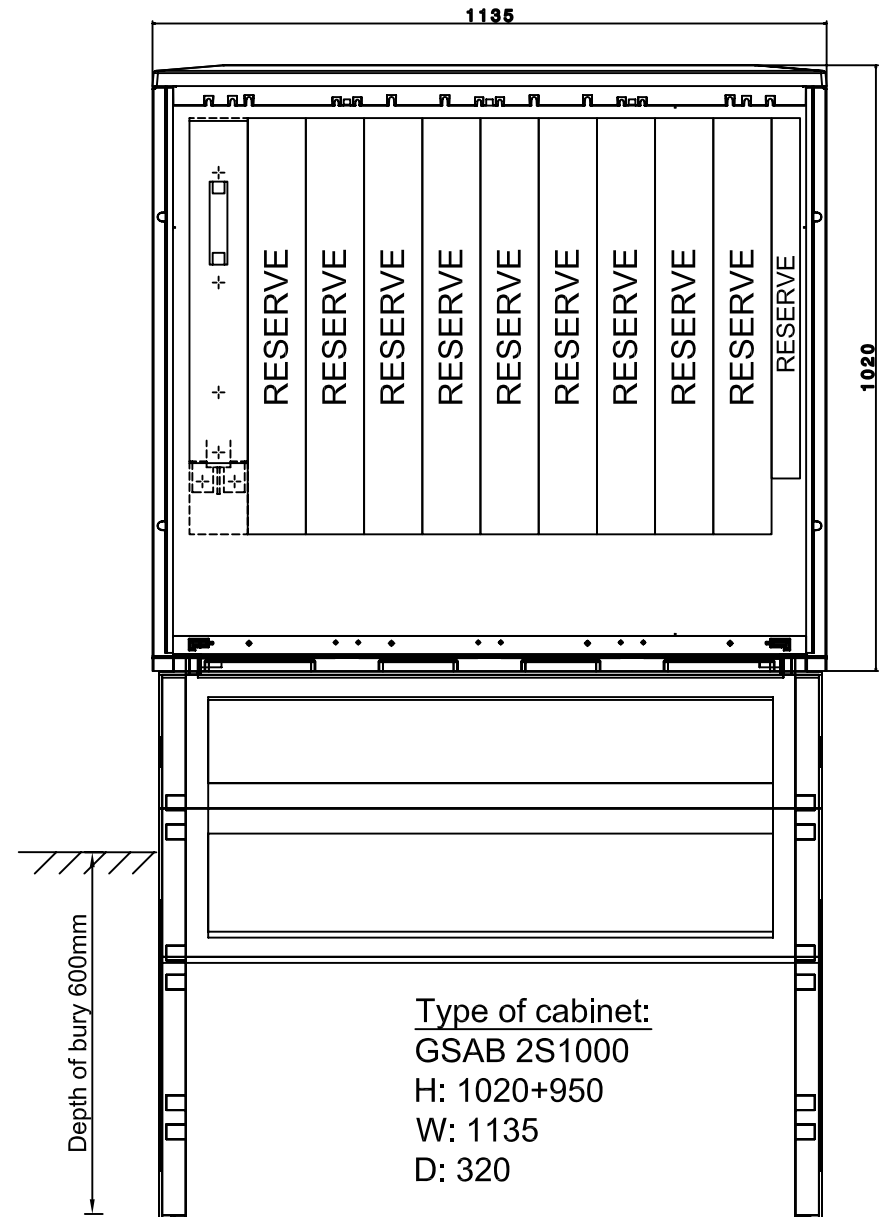

			Datum	16.12.2013	Projek: Distributor cabinet Bst.Nr.: 2S1000KLSL2				=
			Bearb.	M.Biermann					+
			Gepr.						
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.		



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.  
 99718 Greußen Fax: 49/03636/7614-30 1 Bl.