

Distributon cabinet with special depth 470mm
 usable depth up to lock: 403mm



inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 61439-5

protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle right 2/3 door
 dual swing handle left 1/3 door
 (with profile cylinder lock inside)

optional:

- steel installation panel zinc platet
- protection class IP54
- dual swing handle
- RAL-painting on the outside
- PVC installation panel 6mm

Matching base: 2NSE470 (order separate)

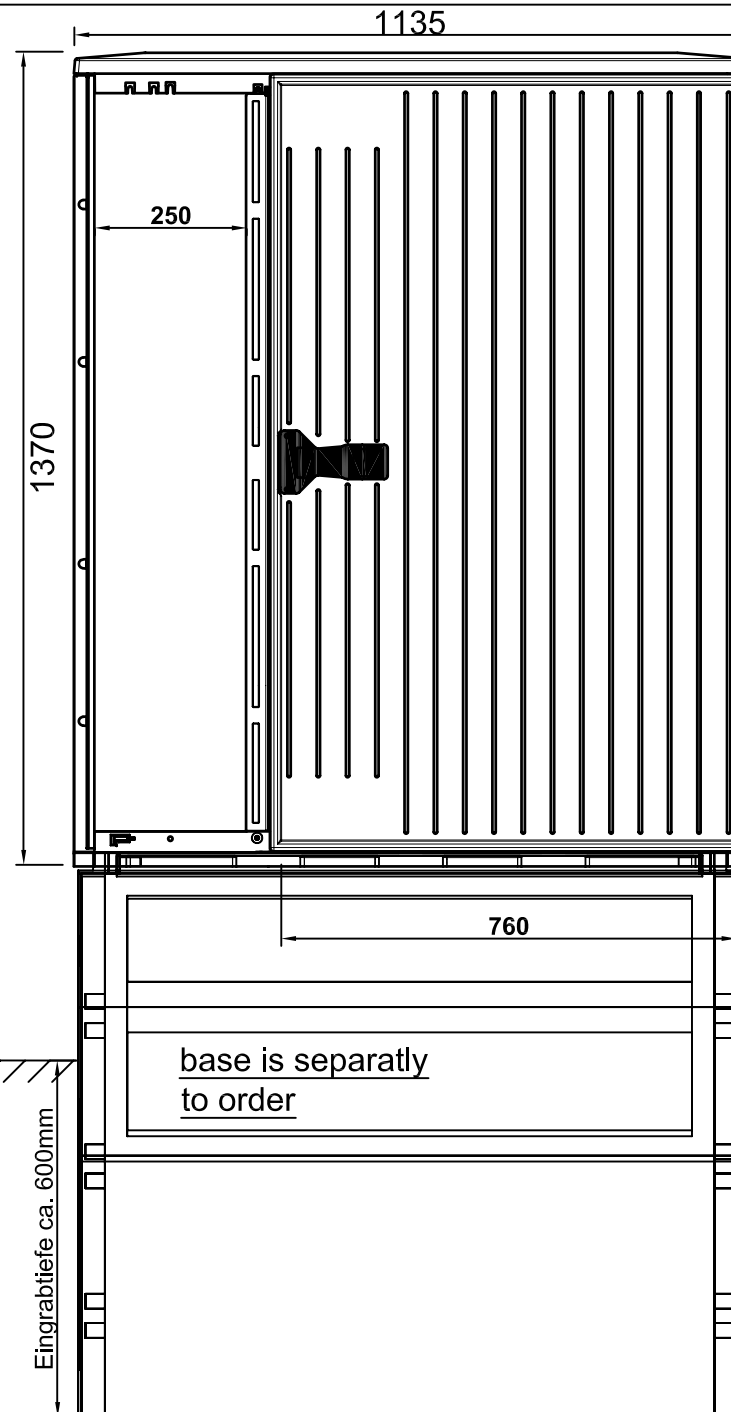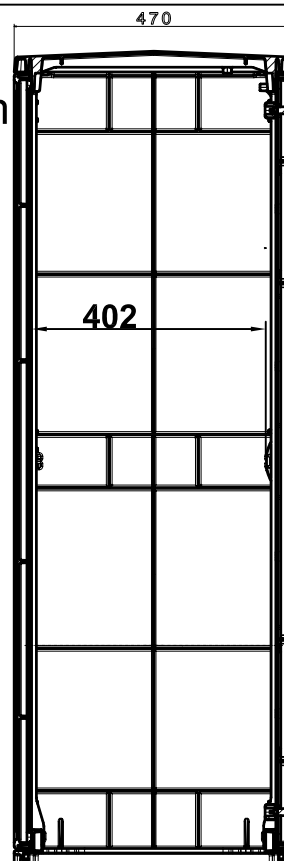

Eingrabitiefe ca. 600mm

			Datum	19.12.2013	Project:Distributon cabinet Best.-Nr2S1300DS1ES2-470	Ang.-Nr.:	
			Bearb.	M.Biermann		Auf.-Nr.:	
			Gepr.				
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.



GSAB
 Elektrotechnik GmbH

				=
				+
Lindenstraße 23	Tel:	49/03636/7614-76	Bl. 1	v.
99718 Greußen	Fax:	49/03636/7614-30	1	Bl.