

# distribution cabinet with special depth 470mm

usable depth up to lock: 403 mm



inspected according to VDE 0660 part 500 / IEC 439-1  
 inspected by TÜV according to DIN EN 60439-5

protection class of cabinet : IP 44  
 class of protection II ( with electrical insulation )  
 made of : fiberglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : gray, similar to RAL 7035  
 lock : dual-swing handle left door (2/3)  
 dual-swing handle right door (1/3)  
 (with customer profile cylinder lock inside)

## optional:

- installation panel PVC-6mm
- steel installation panel zinc plated 3mm
- protection class IP54
- RAL-painting on the outside

suitable base: 2NS470

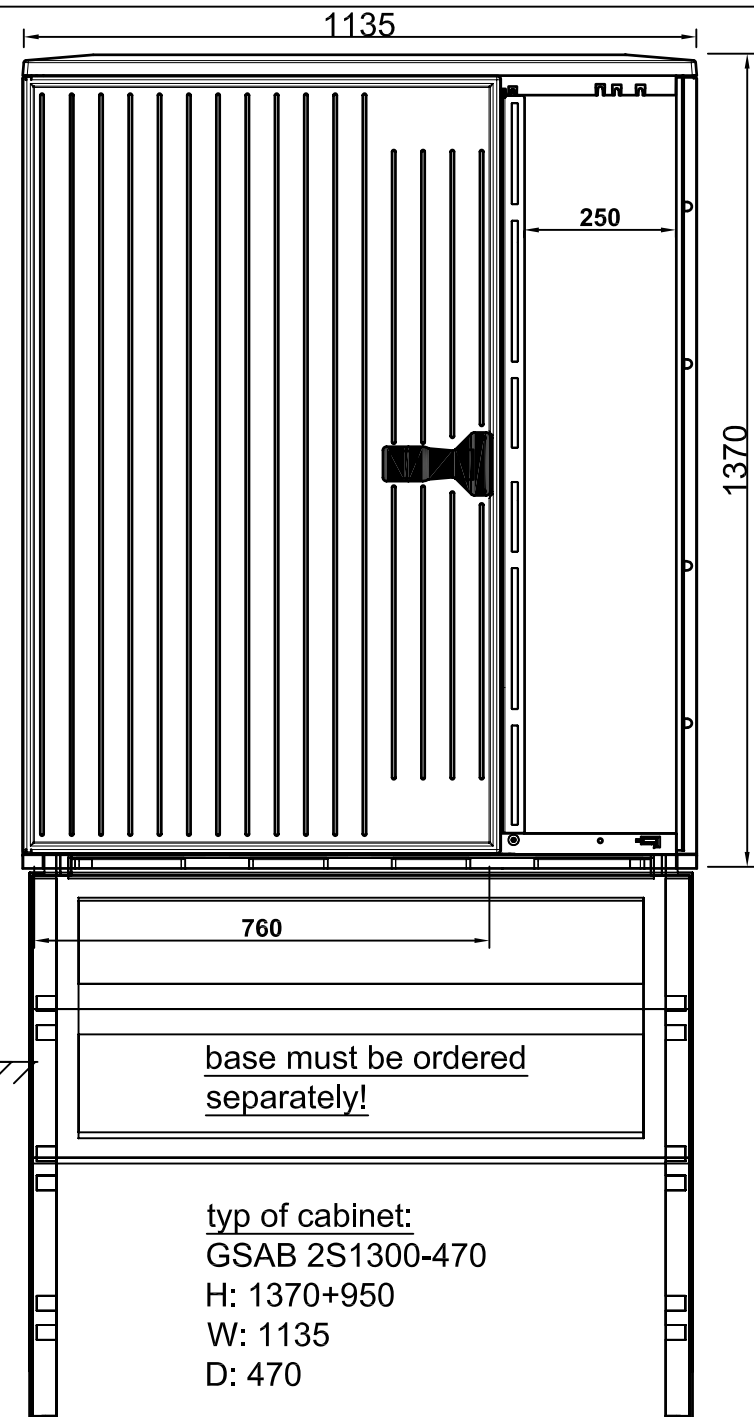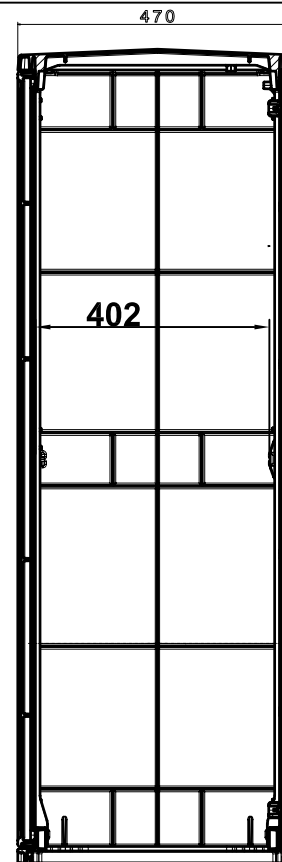

typ of cabinet:  
 GSAB 2S1300-470  
 H: 1370+950  
 W: 1135  
 D: 470

			date	26.06.2015	project: distribution cabinet	offer-no.:	=
			arranger	S.Hasenstein			
			checked		order-no.: 2S1300DS2DS1-470		
change	date	name	norm	origin			Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v. 99718 Greußen Fax: 49/03636/7614-30 1 Bl.



**GSAB**  
 Elektrotechnik GmbH