

distribution cabinet with special depth 470mm

usable depth up to lock: 403 mm

inspected according to VDE 0660 part 500 / IEC 439-1
 inspected by TÜV according to DIN EN 60439-5

protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fiberglass-reinforced polyester (SMC process), IEC-695-2-1, halogen-free
 colour : gray, similar to RAL 7035
 lock : dual-swing handle left door (1/3)
 single-swing handle right door (2/3)
 (with customer profile cylinder lock inside)




contains the following items:

- installation panel PVC-6mm

optional:

- steel installation panel zinc plated 3mm
- protection class IP54
- RAL-painting on the outside

suitable base: 2NS470

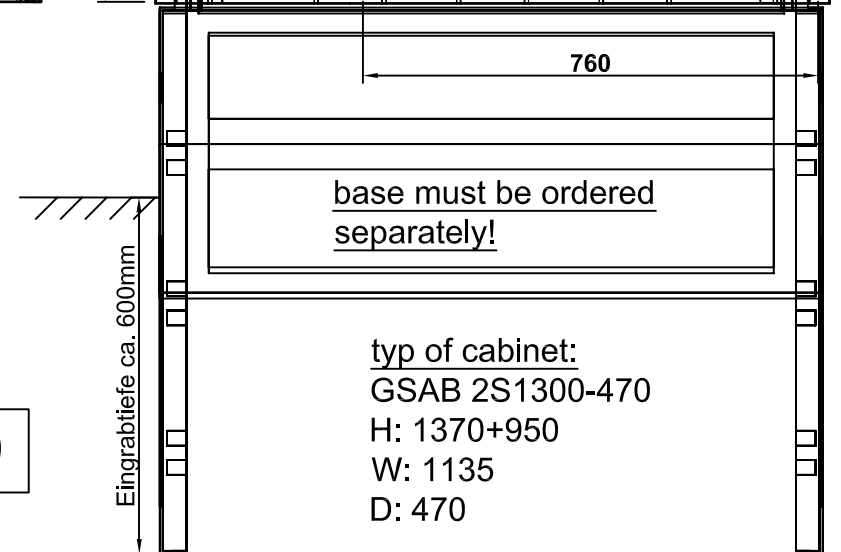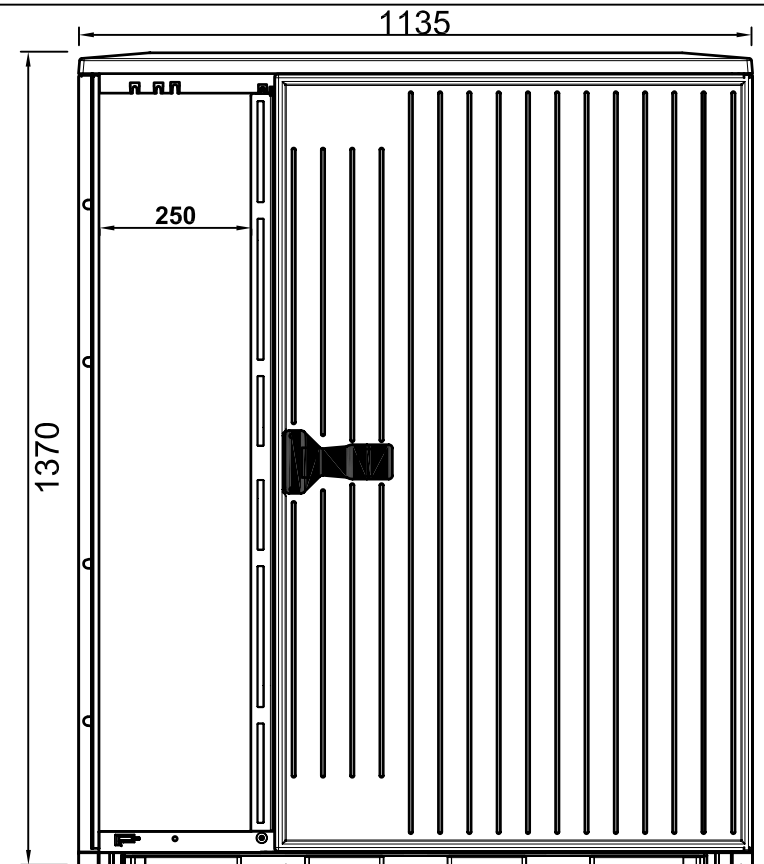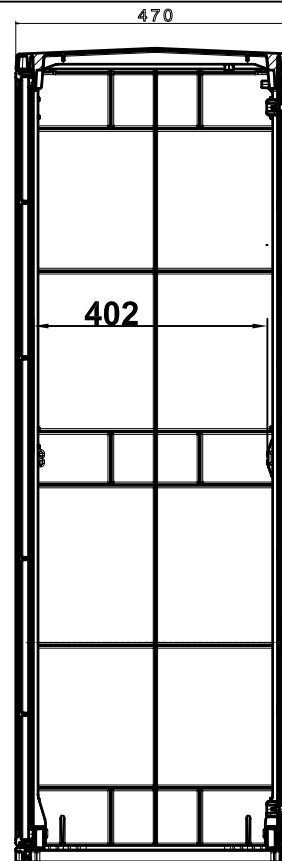

| | | | |
|----------|----------------|-------------------------------|------------|
| date | 26.06.2015 | project: distribution cabinet | offer-no.: |
| arranger | S.Hasenstein | order-no.: 2S1300MDS1ES2-470 | order-no.: |
| checked | | origin | |
| change | date name norm | | |



GSAB
 Elektrotechnik GmbH

| | | |
|-----------------|-----------------------|----------|
| Lindenstraße 23 | Tel: 49/03636/7614-76 | Bl. 1 v. |
| 99718 Greußen | Fax: 49/03636/7614-30 | 1 Bl. |