

distribution cabinet with special depth 470mm

usable depth up to lock: 403 mm

inspected according to VDE 0660 part 500 / IEC 439-1
 inspected by TÜV according to DIN EN 60439-5

protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fiberglass-reinforced polyester (SMC process), IEC-695-2-1, halogen-free
 colour : gray, similar to RAL 7035
 lock : single-swing handle left door (1/3)
 single-swing handle right door (2/3)
 (with customer profile cylinder lock inside)




contains the following items:

- installation panel PVC-6mm

optional:

- steel installation panel zinc plated 3mm
- protection class IP54
- RAL-painting on the outside

suitable base: 2NS470

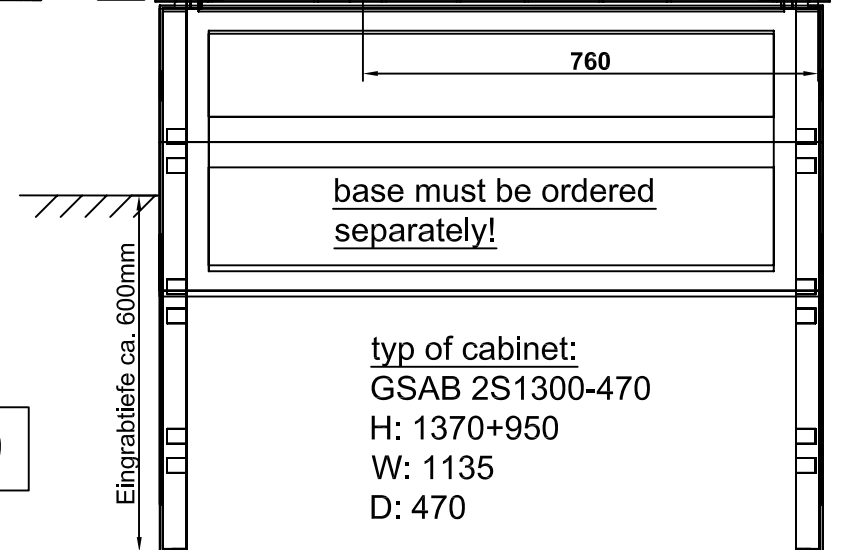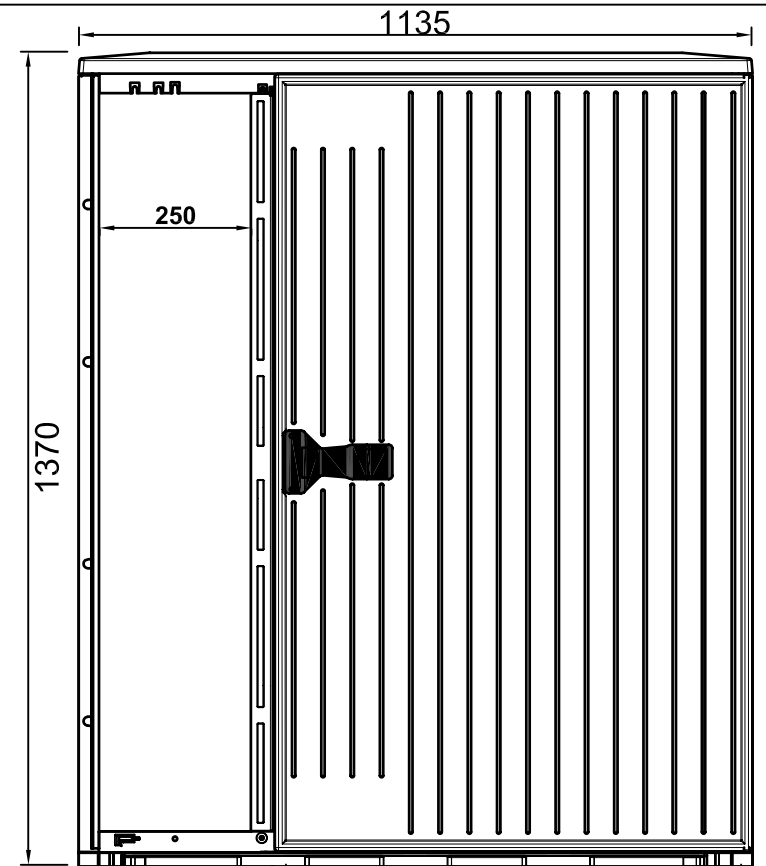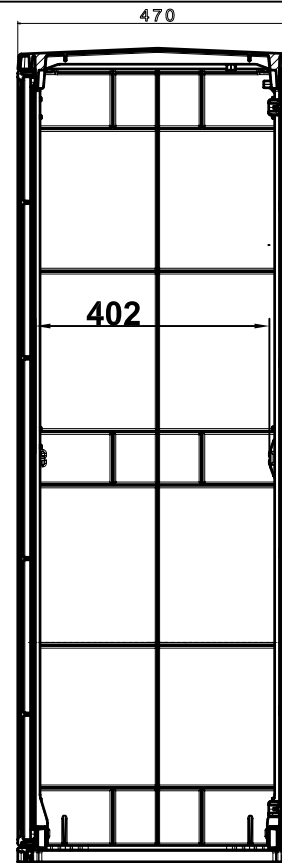

date	26.06.2015	project: distribution cabinet	offer-no.:
arranger	S.Hasenstein	order-no.: 2S1300MES1ES2-470	order-no.:
checked		origin	
change	date name norm		



GSAB
 Elektrotechnik GmbH

Lindenstraße 23	Tel: 49/03636/7614-76	Bl. 1 v.
99718 Greußen	Fax: 49/03636/7614-30	1 Bl.