Distributor cabinet

according DIN 43870 bdew guideline 2008
inspected according VDE 0660 part 500 / IEC 439-1
inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP44
class of protection II (with electrical insulation)
made of : fibreglass-reinforced polyester
(SMC process), IEC-695-2-1, halogen-free
colour : grey, similar to RAL 7035
lock: single swing handle
(with profile cylinder inside)

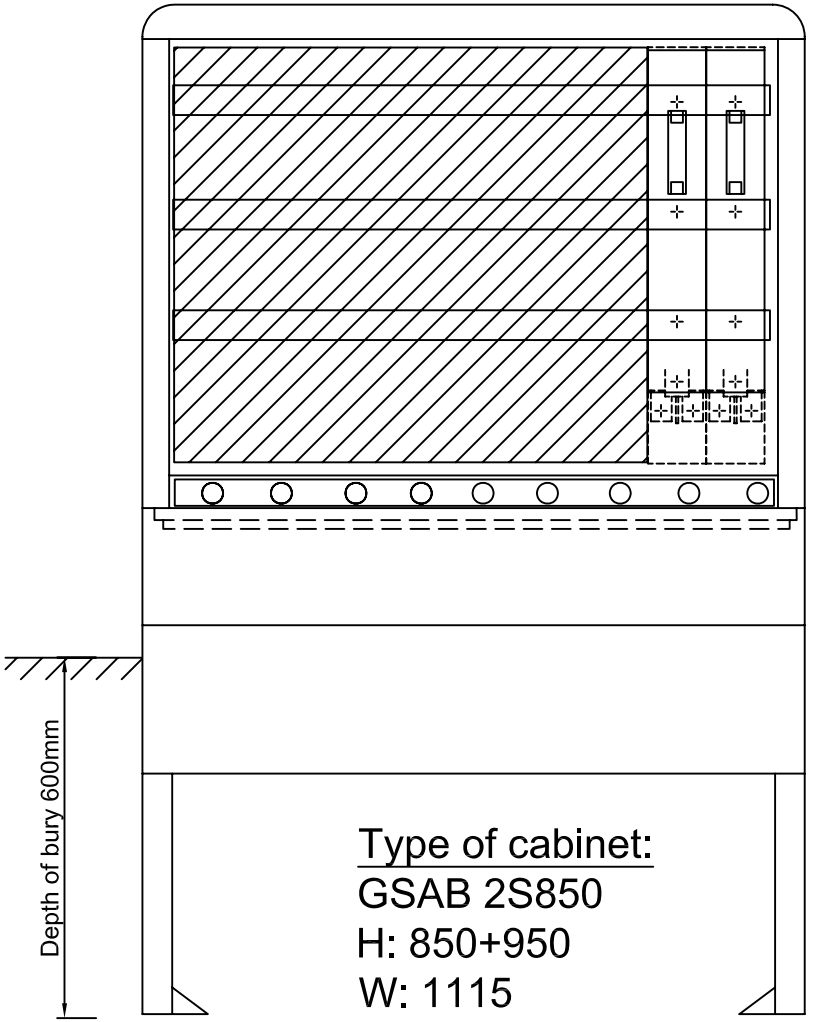

Type of cabinet:
GSAB 2S850
H: 850+950
W: 1115
D: 320

contains the following items:

- 4-pole busbar system 30x5mm
- 2x NH2 vertical fuse switch disconnector
- protection cover against accidental contact
- reserve places
- cable clamp rail in the cabinet

optional:

- filling material for base SFM2
- dual swing handle
- RAL-painting on the outside

				Datum	06.12.2013	Project: Distributor cabinet	Ang.-Nr.:	GSAB	=
				Bearb.	M.Biermann	**Best.Nr.:2S850K-2LSL2**	Auf.-Nr.:	Elektrotechnik GmbH	+
						Urspr. / Ers.f.	Ers.d.	Lindenstraße 23 Tel: 49/03636/7614-76	Bl. 1 v.
								99718 Greußen Fax: 49/03636/7614-30	1 Bl.