

Distributor cabinet

according DIN 43870 bdew guideline 2008
 inspected according VDE 0660 part 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey, similar to RAL 7035
 lock: single swing handle
 (with profile cylinder inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 5x NH2 vertical fuse switch disconnectors
- 10x NH00 vertical fuse switch disconnectors
- protection cover against accidental contact

optional:

- filling material for base SFM2
- dual swing handle
- RAL-painting on the outside

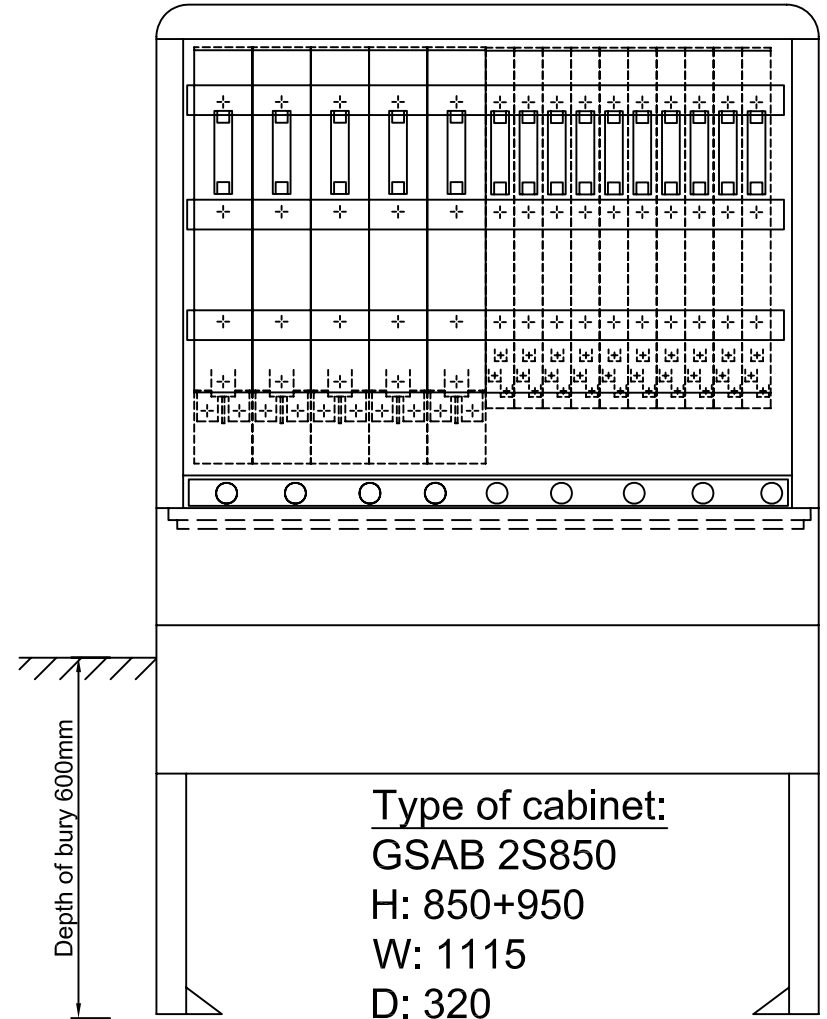

			Datum	09.12.2013	Project: Distributor cabinet	Ang.-Nr.:	=		
			Bearb.	M.Biermann					Best.Nr.:2S850K5LSL2-10LSL00
			Urspr.		Ers.f.	Ers.d.	Lindenstraße 23	Tel: 49/03636/7614-76	Bl. 1 v.
							99718 Greußen	Fax: 49/03636/7614-30	1 Bl.



GSAB
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76
 99718 Greußen Fax: 49/03636/7614-30