Distributor cabinet

according DIN 43870 bdew-guideline 2008 inspected according VDE 0660 Teil 500 / IEC 439-1 inspected by TÜV according DIN EN 60439-5

protection class of cabinet: IP 44

class of protection II (with electrical insulation)

made of : fibreglass-reinforced polyester

(SMC process), IEC-695-2-1, halogen-free

colour: grey, similar to RAL 7035

lock: simple locking


(with Euro profile half cylinder lock inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 4xNH00-vertical disconnection fuse
- cover protection against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

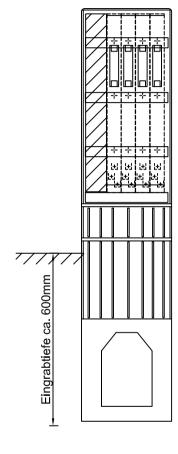

Typ of cabinet:

GSAB 32S1400

H: 1420

W: 320

D:234

				Datum Bearb. Gepr.	i J.Drechsier	, ,	outor cabinet 00K4xLSL003	AngNr.: AufNr.:
Zust.	Änderung	Datum	Name	Norm		Urspr.	Ers.f.	Ers.d.





		+				
Lindenstraße 23	Tel:	49/03636/7614-76	Bl. 1	٧.		
99718 Greußen	Fax:	49/03636/7614-30	1	Bl.		