

# Distributor cabinet

according DIN 43870 bdew-guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44  
 class of protection II ( with electrical insulation )  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey , similar to RAL 7035  
 lock: simple locking  
 (with Euro profile half cylinder lock inside)

## contains the following items:

- 4-pole busbar system 30x5mm
- 1xNH2-vertical disconnection fuse
- 1xNH00-vertical disconnection fuse
- cover protection against accidental contact
- cable clamp rail in the cabinet

## optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

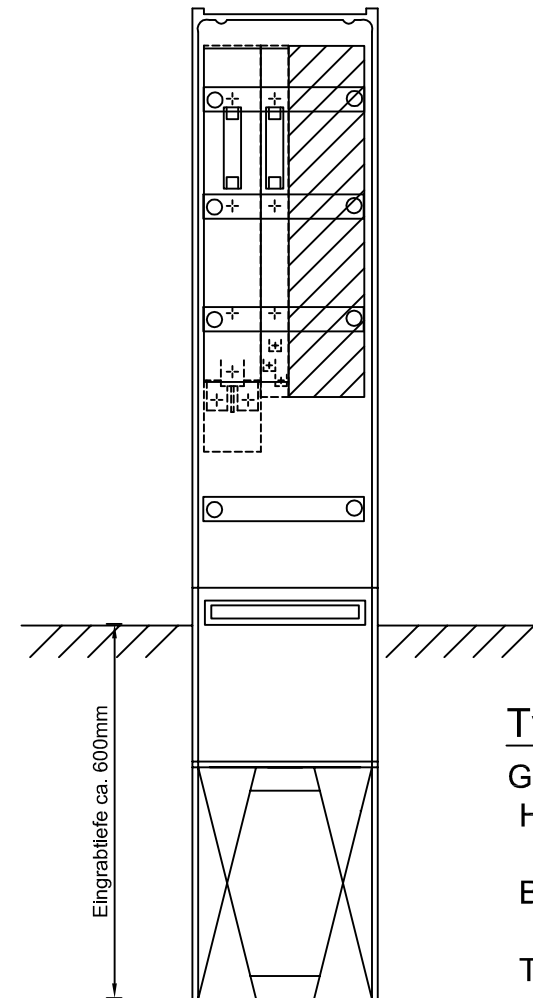

## Typ of cabinet

GSAB 35S1710

H : 1710

B : 350

T : 280

			Datum	28.12.10	project: distributor cabinet	Ang.-Nr.:		
			Bearb.	J.Drechsler		order-no: 35S17KLSL2+LSL00	Auf.-Nr.:	
Zust.	Anderung	Datum	Name	Norm		Urspr.	Ers.f.	Ers.d.



**GSAB**  
 Elektrotechnik GmbH