

distribution cabinet with special depth 470mm

usable depth up to lock: 403 mm

inspected according to VDE 0660 part 500 / IEC 439-1

inspected by TÜV according to DIN EN 60439-5

protection class of cabinet : IP 44

class of protection II (with electrical insulation)

made of : fiberglass-reinforced polyester

(SMC process), IEC-695-2-1, halogen-free

colour : gray, similar to RAL 7035

door: two symmetrical doors

lock : dual-swing handle

(with customer profile cylinder lock inside)




contains the following items:

- installation panel PVC-6mm


optional:

- steel installation panel zinc platet 3mm
- protection class IP54
- RAL-painting on the outside
- single-swing handle
- separate closable doors
- bulkhead between the doors

suitable base: 3NS470

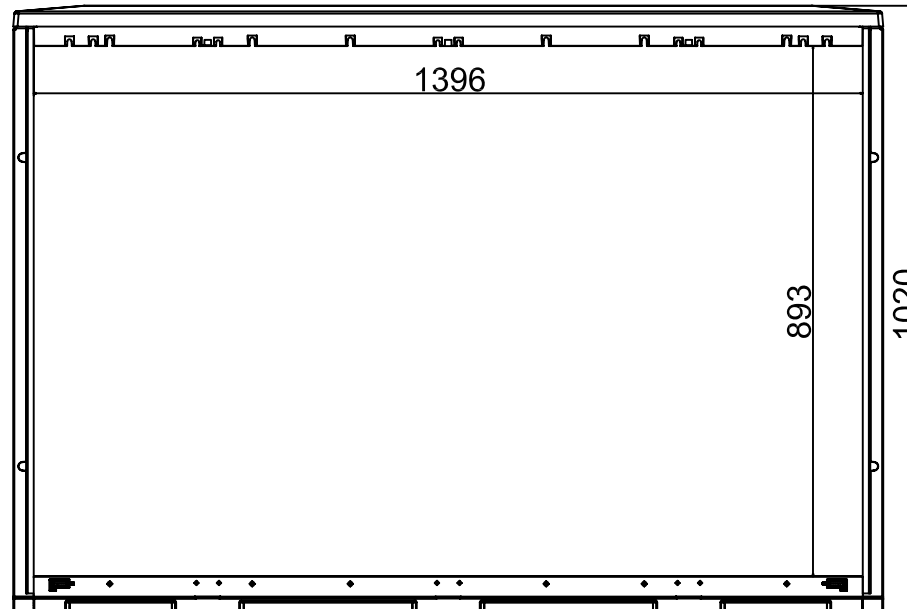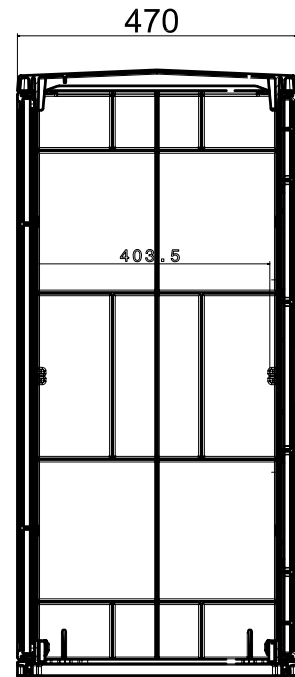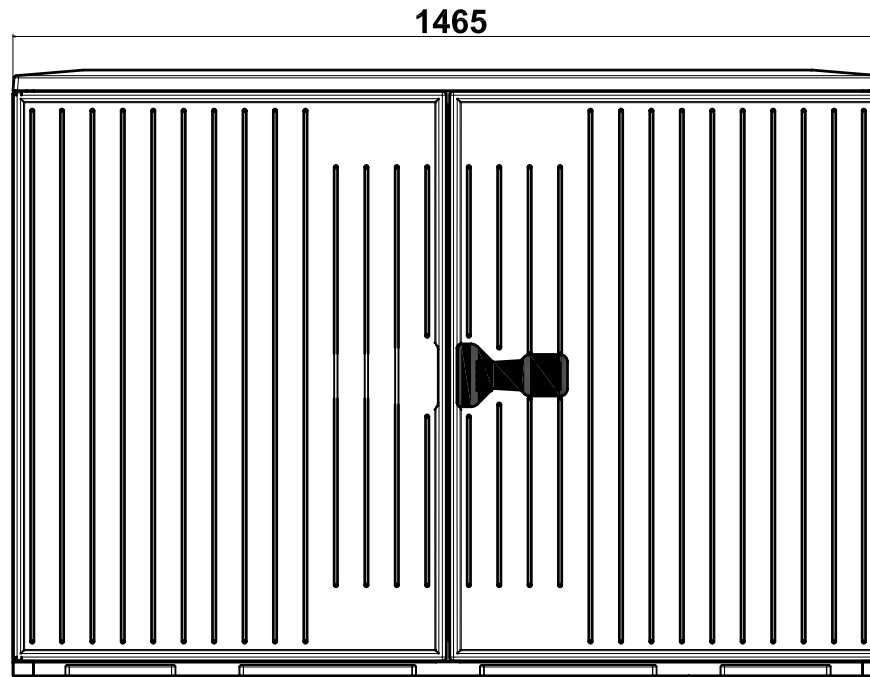

typ of cabinet:
GSAB 3S1000-470
 H: 1020+950
 W: 1465
 D: 470

			date	26.06.2015	project: distribution cabinet order-no.: 3S1000-470MDS	offer-no.:		 GSAB Elektrotechnik GmbH	=		
			arranger	S.Hasenstein		order-no.:			+		
			checked			origin					
change	date	name	norm						Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.