

distribution enclosure 400A

(special depth 470mm)

inspected according to VDE 0660 part 500 / IEC 439-1
inspected by TÜV according to DIN EN 60439-5

protection class of cabinet : IP 44

class of protection II (with electrical insulation)

made of : fiberglass-reinforced polyester

(SMC process), IEC-695-2-1, halogen-free

colour : gray, similar to RAL 7035

lock : single swing handle

(with customer profile cylinder lock inside)




contains the following items:

- 4-pole busbar system 30x10mm (185mm busbar distance)
- cover protection against accidental contact
- cable clamp rail

optional:

- 5-pole busbar system
- tinned busbar system
- 1/3-2/3-door (separate closure)
- bulkhead between the doors
- protection class IP54
- basefiller
- dual swing handle

**suitable base:
3NS470**

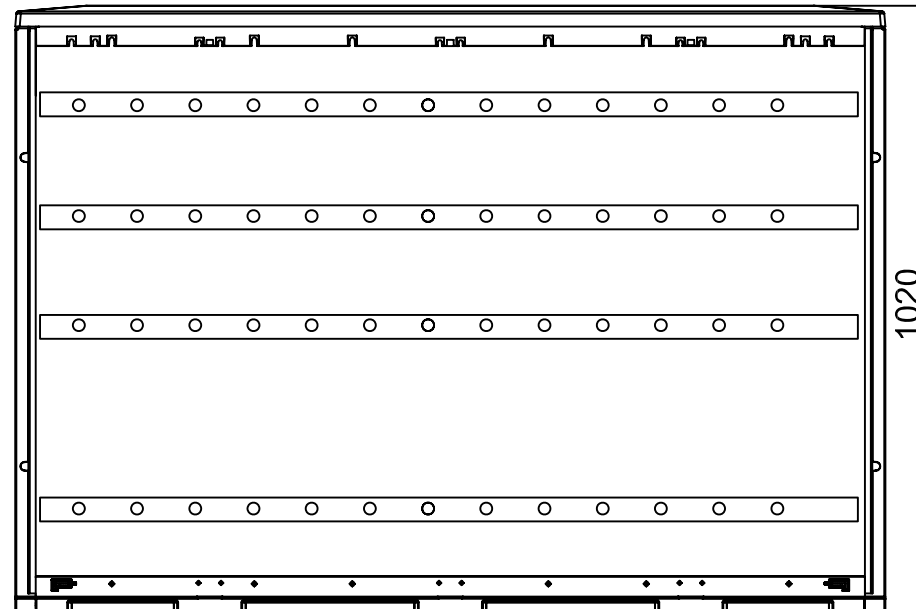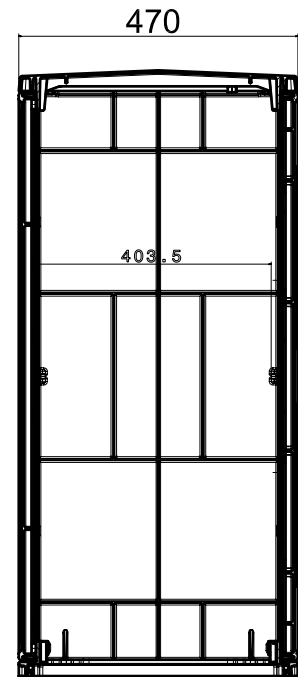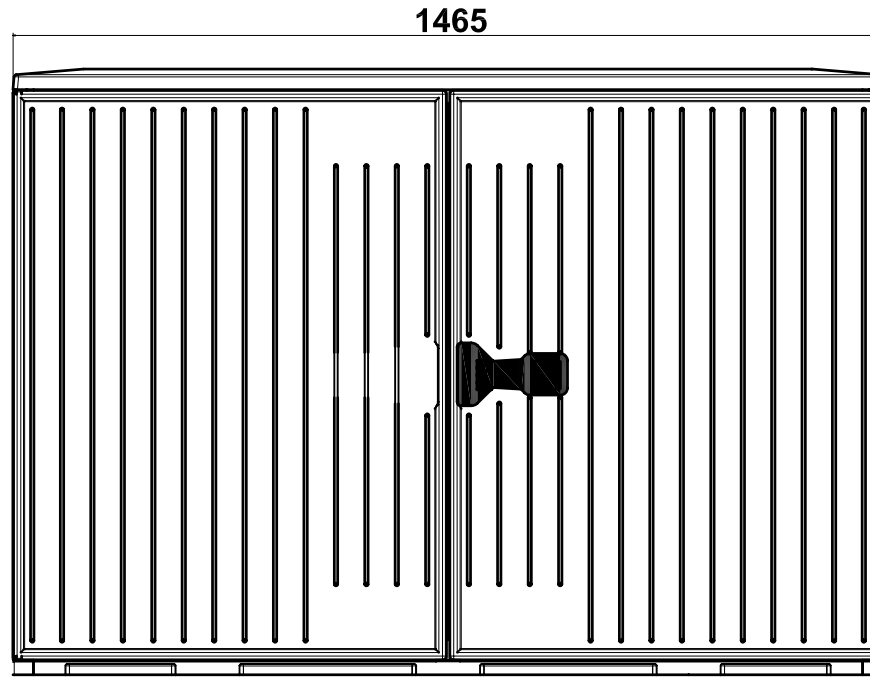

typ of cabinet:
GSAB 3S1000-470
H: 1020+950
W: 1465
D: 470

			date	26.06.2015	project: distribution enclosure	offer-no.:	=			
			arranger	S.Hasenstein				order-no.: 3S1000K-470	order-no.:	+
			checked							
change	date	name	norm	origin				Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.		
								99718 Greußen Fax: 49/03636/7614-30 1 Bl.		



GSAB
Elektrotechnik GmbH