

# Distributor cabinet

## 3S1000K13LSL21LSL00

according DIN 43870 bdew guideline 2008

inspected according VDE 0660 part 500 / IEC 439-1

inspected by TÜV according DIN EN 61439-5

protection class of cabinet : IP44

class of protection II (with electrical insulation)

made of : fibreglass-reinforced polyester

(SMC process), IEC-695-2-1, halogen-free

colour : grey, similar to RAL 7035

lock: single swing handle


(with profile cylinder lock inside)

contains the following items:

- 4-pole busbar system 30x10mm (630A)
- 13x NH2 vertical fuse switch disconnectors
- 1x NH00 vertical fuse switch disconnectors
- protection cover against accidental contact

optional:

- filling material for base SFM3
- cable slot in the base
- RAL-painting on the outside

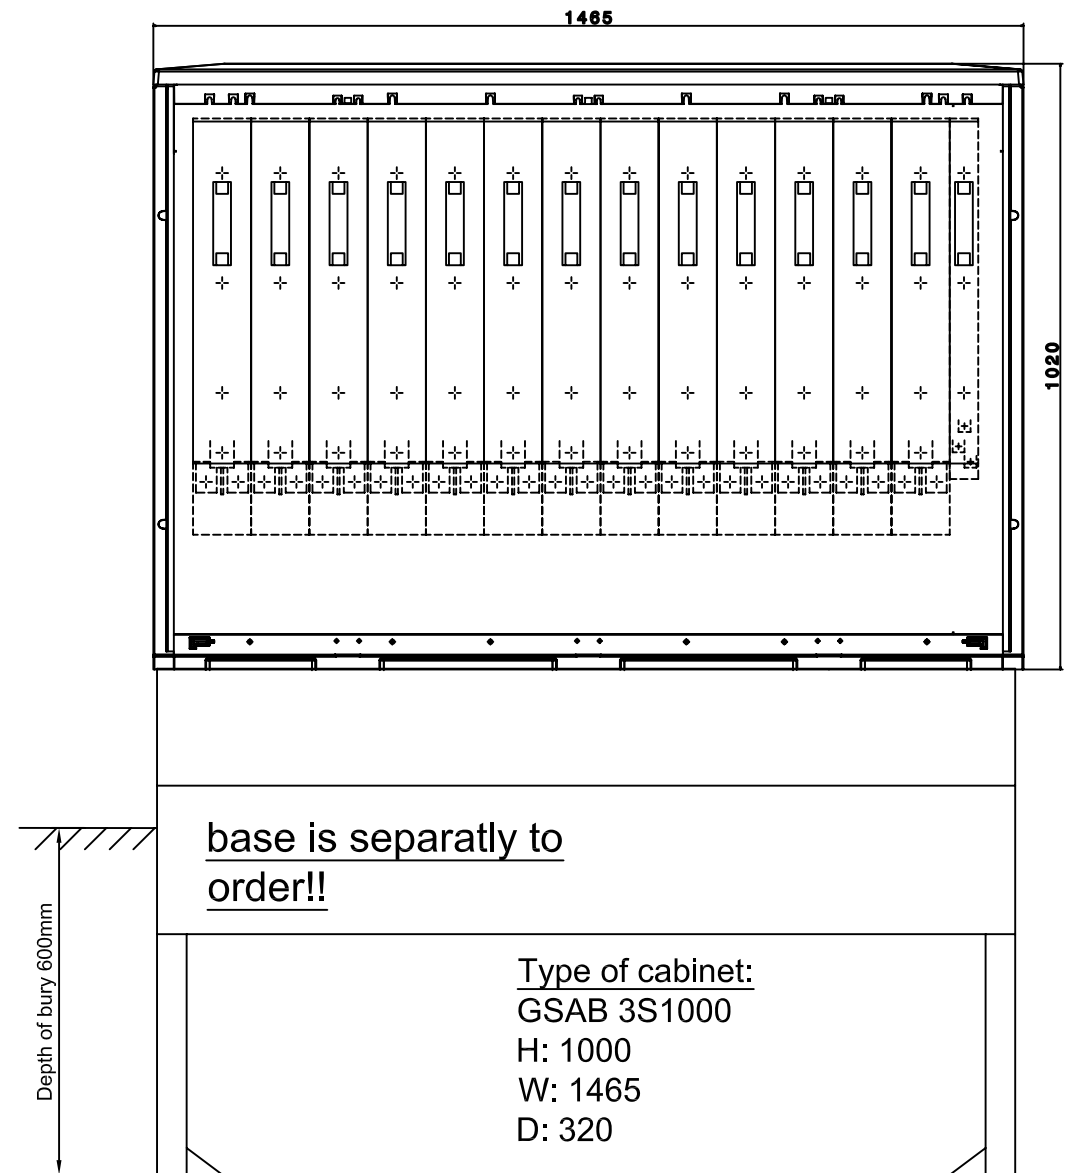

base is separately to order!!

Type of cabinet:

GSAB 3S1000

H: 1000

W: 1465

D: 320

		Datum	18.12.2013	Project: Distributor cabinet	Ang.-Nr.:
		Bearb.	M.Biermann		
				<b>Bst.Nr.:3S1000K13LSL21LSL00</b>	
		Urspr.	Ers.f.	Ers.d.	



**GSAB**  
Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.  
99718 Greußen Fax: 49/03636/7614-30 1 Bl.