

# Distributon cabinet with special depth 470mm


usable depth up to lock: 403mm

inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 61439-5


protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle left 1/3 door  
 (with profile cylinder lock inside)

- optional:
- PVC installation panel 6mm or steel panel - zinc platet
  - protection class IP54
  - RAL-painting on the outside
  - dual swing handle

**matching base: 3NS470**

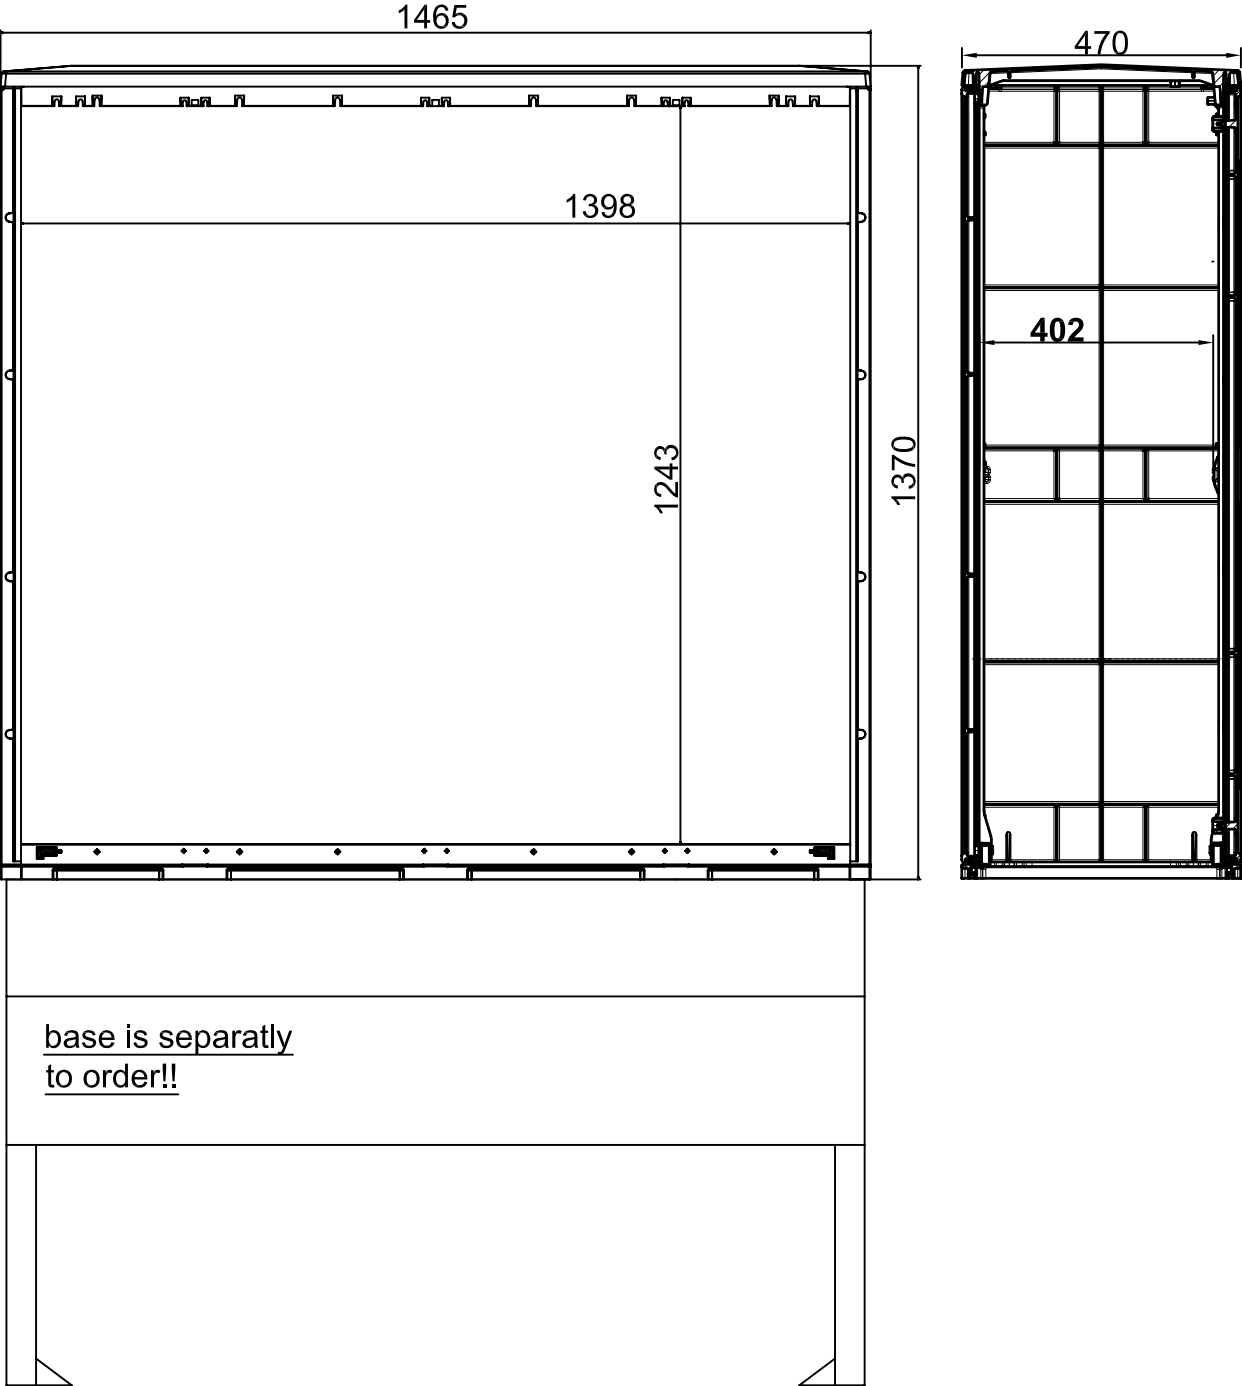

base is separatly to order!!

			Datum	19.12.2013	Projekt:empty cabinet Best.-Nr:3S1300-470	Ang.-Nr.:		 <b>GSAB</b> Elektrotechnik GmbH	=		
			Bearb.	M.Biermann		Auf.-Nr.:			+		
			Gepr.								
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.		Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30	Bl. 1 v. 1 Bl.