

# Distributon cabinet with special depth 470mm

usable depth up to lock: 403mm

inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP44  
 class of protection II (with electrical insulation)  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey, similar to RAL 7035  
 lock: single swing handle left 1/3 door  
 (half cylinder lock inside)


contains the following items:

- PVC installation panel 6mm (1053mm x 890mm)

optional:

- Steel installation panel - zinc platet
- protection class IP54
- bulkhead between the doors
- dual swing handle
- separate closeable door

**matching base : 3NS470**

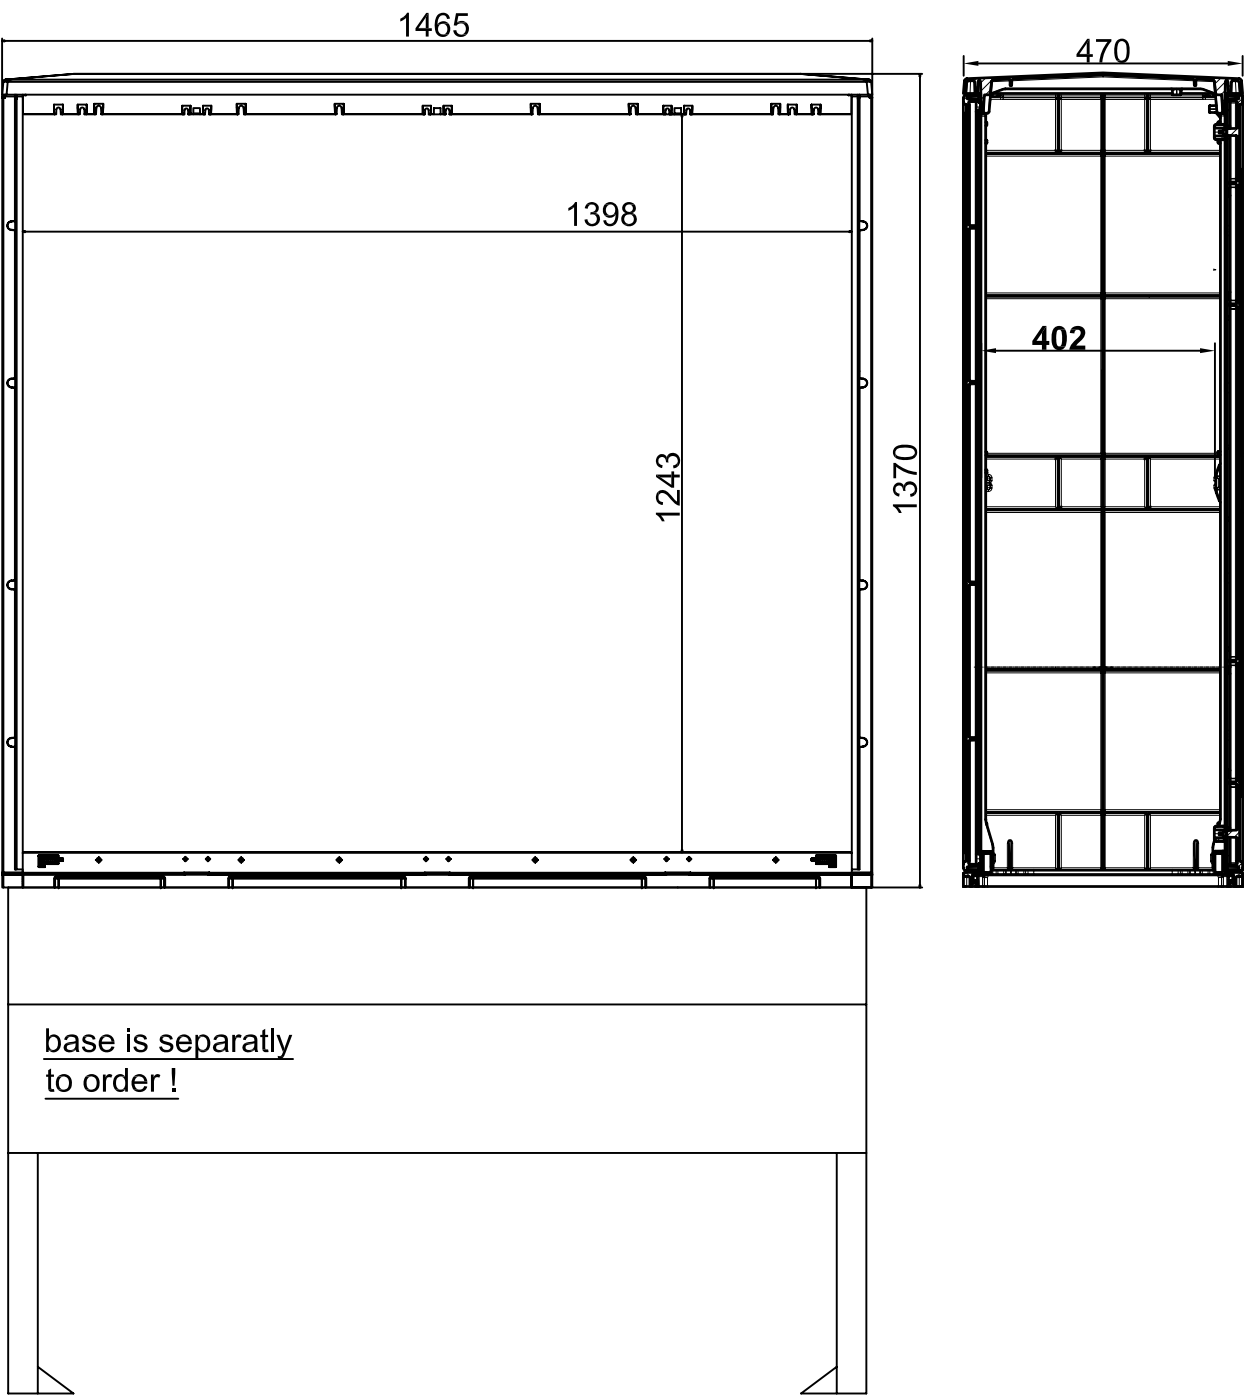

base is separatly to order !

		Datum	19.12.2013	Project:empty cabinet		Ang.-Nr.:			
		Bearb.	M.Biermann	Best.-Nr: 3S1300-470M		Auf.-Nr.:			
		Gepr.		Urspr.	Ers.f.	Ers.d.			
Zust.	Anderung	Datum	Name	Norm					



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v.  
 99718 Greußen Fax: 49/03636/7614-30 1 Bl.