

# wall box for generator junction box

inspected according VDE 0660 Teil 500 / IEC 439-1  
for PV-installations according IEC 60364-7-712

protection class : IP 65

class of protection II (with electrical insulation )

made of : fibreglass-reinforced polyesters

(SMC process), IEC-695-2-1, halogen-free

colour : grey , similar to RAL 7035


lock : double-bit key lock

contains the following items :

- top-hat rail/DIN rail for overvoltage protection STP1000YPVM lightning protection zone concept on the junctions 0B - 1 and higher
- 2x5 pcs PV-protection holder with fuse DC 20A
- cover protection against accidental contact
- 2xterminals for 50mm<sup>2</sup> output
- screw connection 2xM25 (16.263) + 6xM20 (incl. earthing)

optional:


- with DC-switch-disconnector
- single swing handle

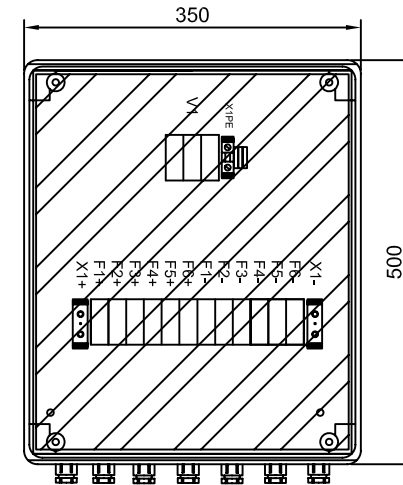

**typ of box:**  
GSAB 50W350

H : 500

W : 350

			Datum	09.11.2011	project: string-box	Ang.-Nr.: 212.....	 <b>GSAB</b> Elektrotechnik GmbH	=		
			Bearb.	H.Vonnoe	order-no: <b>50W350PV5-ÜSS</b>	Auf.-Nr.:		+		
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.		Ers.d.	Lindenstraße 23 99718 Greußen	Tel: 49/03636/7614-76 Fax: 49/03636/7614-30