

Distributor cabinet

according DIN 43870 bdew-guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey , similar to RAL 7035
 lock: simple lock
 (with Euro profile half cylinder lock inside)

contains the following items:

- 4-pole busbar system 30x5mm (100mm)
- 4xNH00-vertical disconnection fuse
 + reserve places
- cover protection against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

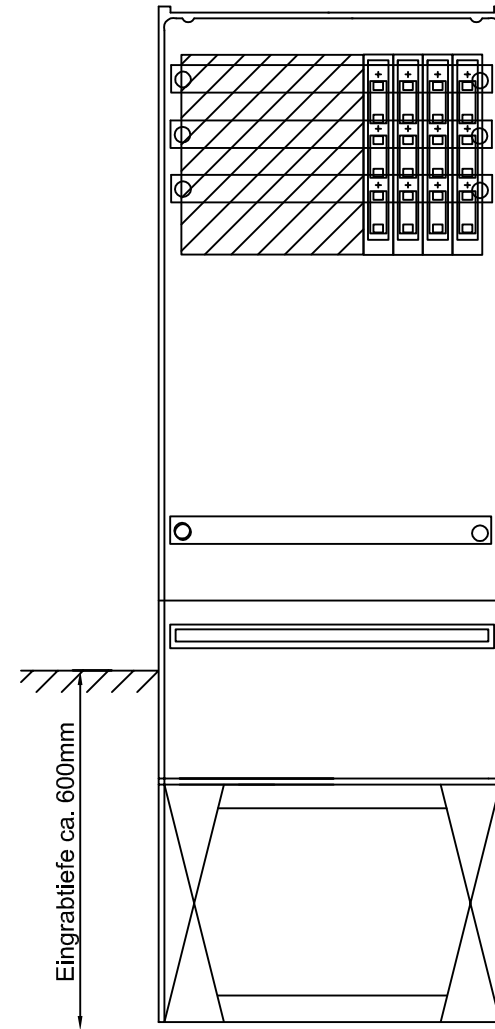

Typ of cabinet:
 GSAB 58 S1700
 H : 1710
 W : 580
 D : 280

| | | | | | | | |
|-------|----------|-------|--------|-------------|--|-----------|--------|
| | | | Datum | 23.12.10 | project: distributor cabinet order-no: 58S1700K4xLSL003-1 | Ang.-Nr.: | |
| | | | Bearb. | J.Drechsler | | Auf.-Nr.: | |
| | | | Gepr. | | | | |
| Zust. | Anderung | Datum | Name | Norm | Urspr. | Ers.f. | Ers.d. |



GSAB
 Elektrotechnik GmbH

| | | |
|----------------------------------|--|-----------------------------|
| Lindenstraße 23 99718 Greußen | Tel: 49/03636/7614-76 Fax: 49/03636/7614-30 | = + Bl. 1 v. 1 Bl. |
|----------------------------------|--|-----------------------------|