

Distributor cabinet

according DIN 43870 bdew-guldellne 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 Inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey , similar to RAL 7035
 lock: single swing handle
 (with Euro profile half cylinder lock inside)


contains the following items:

- 4-pole busbar system 30x10mm
- 4xNH2-vertical disconnection fuse
- 4x100mm reserve place
- cover protection against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

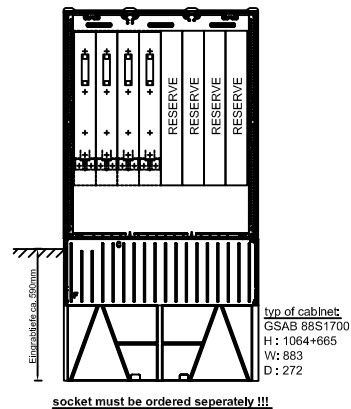

Verf. / Änderung	Wdhm. / Item	Urspr. / Draw	Datum: 2013/02/01 Gepr. / Gepr.: Projekt: distributor cabinet order-no: 88S1700K630A-LSL2	Ang-Nr. / Art-Nr.: 104	 GSAB Elektrotechnik-Gesamt	D: 272 W: 883 H: 1064+665 Typ of cabinet: GSAB 88S1700	4003030/016405 4003030/016405
------------------	--------------	---------------	--	---------------------------	--	--	----------------------------------