

## Distributor cabinet

according DIN 43870 bdeW-guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44  
 class of protection II ( with electrical insulation )  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey , similar to RAL 7035  
 lock: simple lock  
 (with Euro profile half cylinder lock inside)

### contains the following items:

- 4-pole busbar system 30x10mm
- 16xNH00-vertical disconnection fuse
- cover protection against accidental contact
- cable clamp rail in the cabinet

### optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

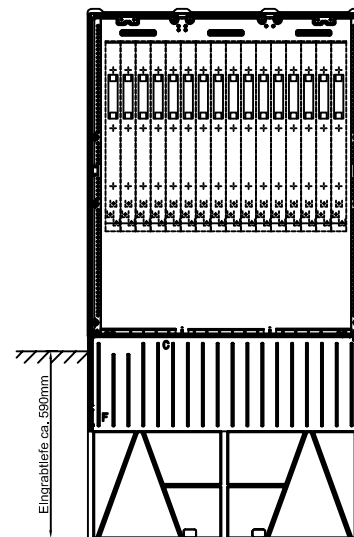

typ of cabinet:  
 GSAB 88S1700  
 H : 1064+665  
 W: 883  
 D : 272

**socket must be ordered seperately !!!**

		Datum 23.12.2010	project: distributor cabinet	Ang.-Nr.:		
		Bearb. A. Fiedler	order-no: 88S1700K-16LSL00	Auf.-Nr.:		
		Gepr.				
Zust. / Änderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.



**GSAB**  
 Elektrotechnik GmbH

Lindenstraße 23 Tel: 4903636/7614-76  
 99718 Greußen Fax: 4903636/7614-30

BL 1 v.  
 1 BL