

### Distributor cabinet

according DIN 43870 bdew-guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44  
 class of protection II ( with electrical insulation )  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey , similar to RAL 7035  
 lock: single swing handle  
 (with Euro profile half cylinder lock inside)

contains the following items:

- 4-pole busbar system 30x5mm
- 4xNH2-vertical disconnection fuse
- 4x100mm reserve place
- cover protection against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

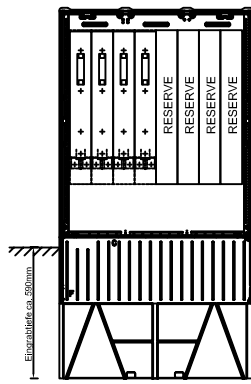

**socket must be ordered separately !!!**

type of cabinet:  
 GSAB 88S1700  
 H : 1064+665  
 W: 883  
 D : 272

Date: 23.12.2010		Project: distributor cabinets		Page: 1/1	
Drawn: Z.L.H.G.		Order no: 88S1700K400A-4LSL2		Ref: 10/1	
Checked: [blank]		Order: [blank]		Date: 02.03.2011 15:42:11	
Created: [blank]		Status: [blank]		File: 40-03-03-07-04-02	

