

Distributor cabinet

according DIN 43870 bdew-guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey , similar to RAL 7035
 lock: single swing handle
 (with Euro profile half cylinder lock inside)


already installed:

- installation plate PVC 6mm

optional:

- 1/3 + 2/3 - door
- protection class of cabinet : IP54
- dual swing handle
- RAL-painting on the outside

socket for soil installment or build-up socket must be ordered seperately (88SE/88SB)!

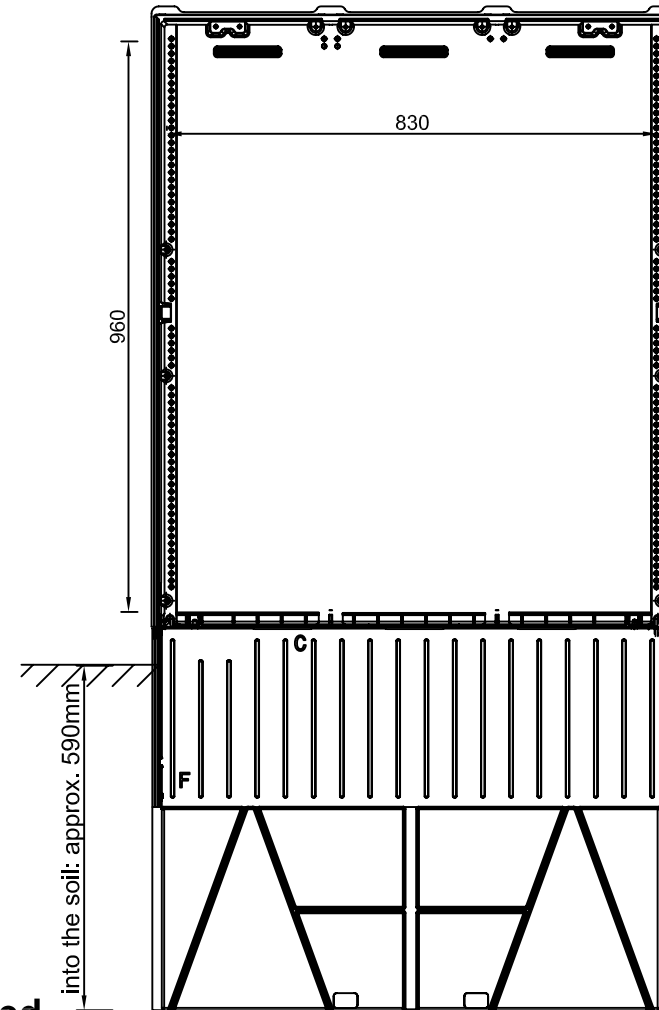

typ of cabinet:
 GSAB 88S1700
 H : 1039+660
 W : 888
 T : 272

			Datum	25.07.2011	project: empty cabinet order-no: 88S1700M	Ang.-Nr.:		=
			Bearb.	H.Vonnoe		Auf.-Nr.:		+
			Gepr.					
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.	
								Lindenstraße 23 Tel: 49/03636/7614-76 Bl. 1 v. 99718 Greußen Fax: 49/03636/7614-30 1 Bl.



GSAB
 Elektrotechnik GmbH