

Distributor cabinet

according DIN 43870 bdew-guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey , similar to RAL 7035
 lock:

- 1/3-door with single swing handle
 (with Euro profile half cylinder lock inside)
- 2/3-door with dual swing handle
 (with Euro profile half cylinder lock inside)


already installed:

- installation plate PVC 6mm

optional:

- protection class of cabinet : IP54
- RAL-painting on the outside

socket for soil installment or build-up socket must be ordered seperately (88SE/88SB)!

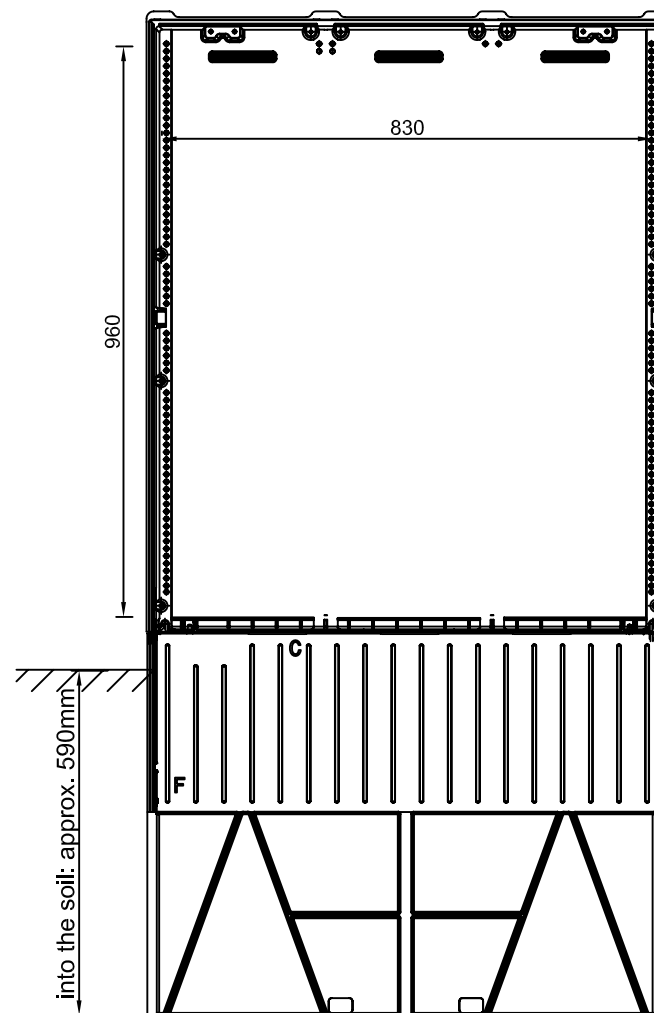

typ of cabinet:

GSAB 88S1700

H : 1039+660

W : 888

T : 272

			Datum	08.01.2013		
			Bearb.	M.Biermann	empty cabinet	Ang.-Nr.:
			Gepr.		order-no: 88S1700MT2	Auf.-Nr.:
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.d.



GSAB
 Elektrotechnik GmbH

				=
				+
Lindenstraße 23	Tel:	49/03636/7614-76	Bl. 1	v.
99718 Greußen	Fax:	49/03636/7614-30	1	Bl.