Distributor cabinet

according DIN 43870 bdew-guideline 2008
inspected according VDE 0660 Teil 500 / IEC 439-1
inspected by TÜV according DIN EN 60439-5

protection class of cabinet : IP 44
class of protection II (with electrical insulation)
made of : fibreglass-reinforced polyester
(SMC process), IEC-695-2-1, halogen-free
colour : grey , similar to RAL 7035
lock:
1/3-door with single swing handle
(with Euro profile half cylinder lock inside)
2/3-door with dual swing handle
(with Euro profile half cylinder lock inside)

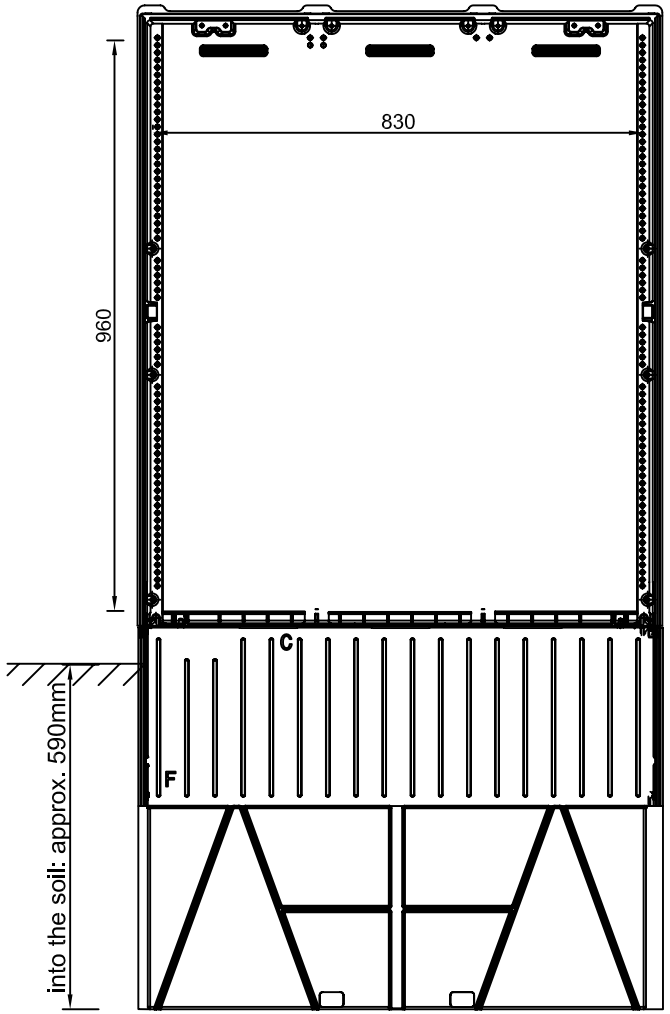

typ of cabinet:
GSAB 88S1700
H : 1039+660
W : 888
T : 272

optional:

- protection class of cabinet : IP54
- RAL-painting on the outside

socket for soil installment or build-up socket must be ordered seperately (88SE/88SB)!

				Datum	08.01.2013	empty cabinet order-no: **88S1700T2**	Ang.-Nr.: Auf.-Nr.:	GSAB Elektrotechnik GmbH
				Bearb.	M.Biermann			
				Gepr.				
Zust.	Änderung	Datum	Name	Norm		Urspr. / Ers.f.	Ers.d.	

Lindenstraße 23 Tel: 49/03636/7614-76
99718 Greußen Fax: 49/03636/7614-30