

### Distributor cabinet

according DIN 43870 bdew-guideline 2008  
 inspected according VDE 0660 Teil 500 / IEC 439-1  
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44  
 class of protection II ( with electrical insulation )  
 made of : fibreglass-reinforced polyester  
 (SMC process), IEC-695-2-1, halogen-free  
 colour : grey , similar to RAL 7035  
 lock: simple lock  
 (with Euro profile half cylinder lock inside)

contains the following items:

- 4-pole busbar system 30x10mm
- 3xNH2-vertical disconnection fuse
- 10xNH00-vertical disconnection fuse
- cover protection against accidental contact
- cable clamp rail in the cabinet

optional:

- filling material for socket SFM1
- dual swing handle
- RAL-painting on the outside

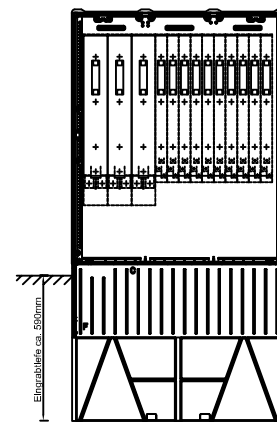

typ of cabinet:  
 GSAB 88S1700  
 H : 1064+665  
 W : 883  
 D : 272