

Cabinet with installation panel (PVC 6mm)

according DIN 43870 bdeW-guideline 2008
 inspected according VDE 0660 Teil 500 / IEC 439-1
 inspected by TÜV according DIN EN 60439-5


protection class of cabinet : IP 44
 class of protection II (with electrical insulation)
 made of : fibreglass-reinforced polyester
 (SMC process), IEC-695-2-1, halogen-free
 colour : grey , similar to RAL 7035
 lock: dual swing handle
 (with Euro profile half cylinder lock inside)

already installed:

- installation plate PVC 6mm

optional:

- single swing handle
- RAL-painting on the outside

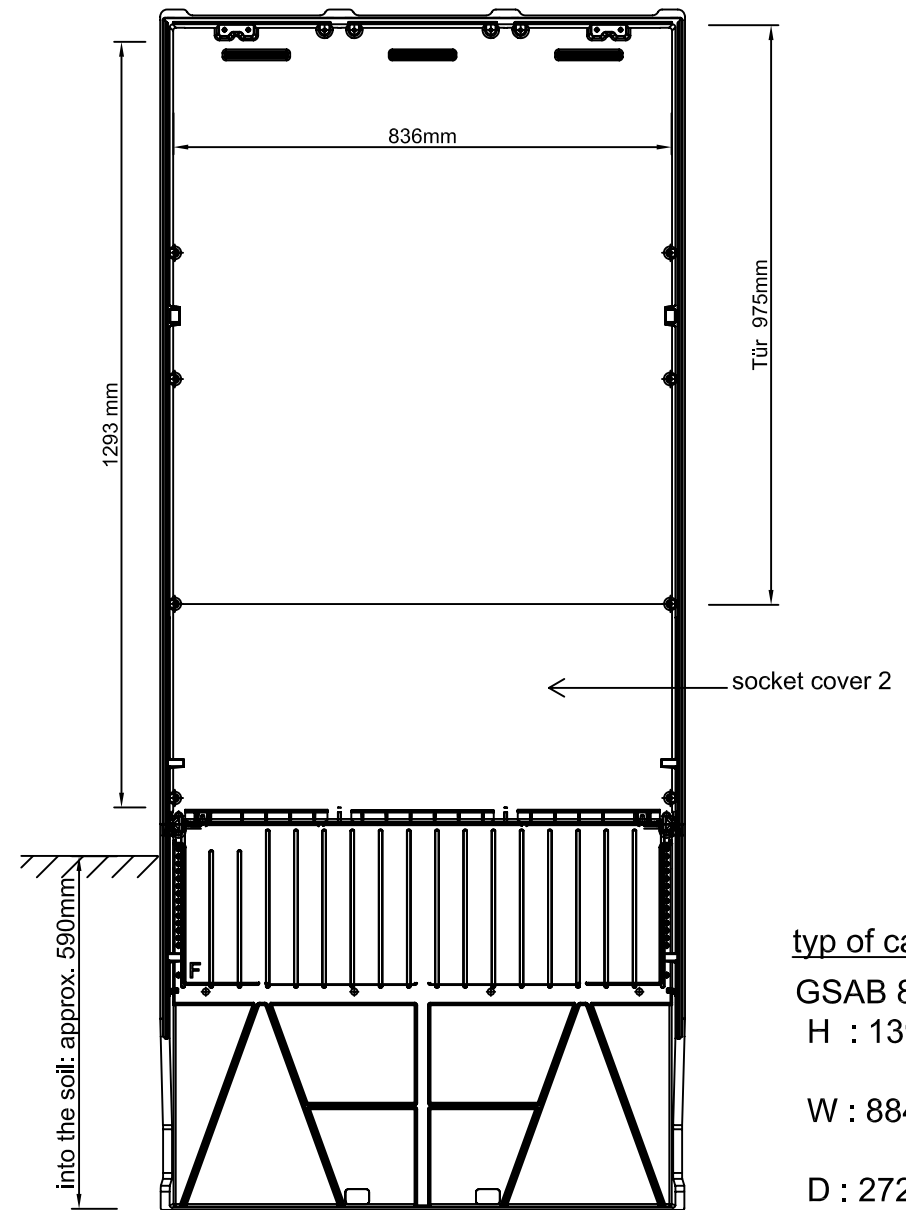

typ of cabinet:

GSAB 88S2000
 H : 1390 + 665

W : 884

D : 272

			Datum	08.01.2013	Project:distributor cabinet		Ang.-Nr.:	
			Bearb.	M.Biermann	order-no:88S2000MDS		Auf.-Nr.:	
Zust.	Anderung	Datum	Name	Norm	Urspr.	Ers.f.	Ers.d.	



GSAB
 Elektrotechnik GmbH

			=	
			+	
Lindenstraße 23	Tel:	49/03636/7614-76	Bl. 1	v.
99718 Greußen	Fax:	49/03636/7614-30	1	Bl.