

Distribution cabinet for market places with distribution section (3-rows)

GSAB 32S1400

according DIN 43870 bdew-guideline 2008
inspected according VDE 0660 Teil 500 / IEC 439-1
inspected by TÜV according DIN EN 60439-5


protection class of cabinet: IP 44
class of protection II (with electrical insulation)
made of: fibreglass-reinforced polyester
(SMC process), IEC-695-2-1,
halogen-free
colour: grey, similar to RAL 7035
lock: single swing handle (with cylinder)

contains the following items:

- input D02/3 + FI63/4/0,03
- cover protection against accidental contact
- B32/3+CEE32
- B16/3+CEE16
- 2xB16+2xplugs (Schuko)

optional:

- filling material for base SFM 0
- cable lead-in in the base

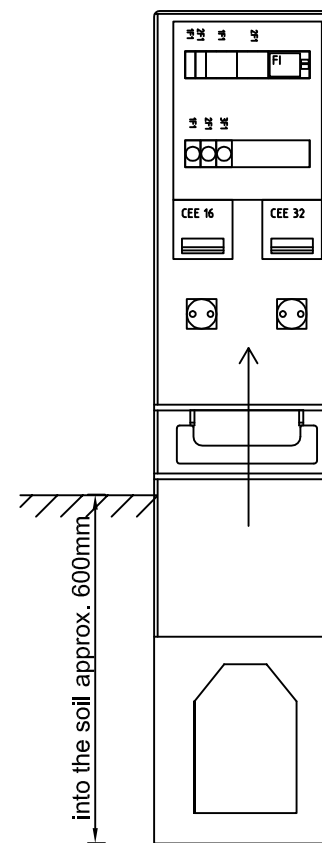

Typ of cabinet:

GSAB 32S1400

H : 1400

W : 320

D : 230

			Datum	17.04.2010	project: distribution cabinet no:32S14FP32+16+2Sch	Ang.-Nr.:	
			Bearb.	H.Vonnoe		Auf.-Nr.:	
Zust.	Anderung	Datum	Name	Norm		Urspr.	Ers.f.



GSAB
Elektrotechnik GmbH

Lindenstraße 23	Tel: 49/03636/7614-76	Bl. 1 v.
99718 Greußen	Fax: 49/03636/7614-30	1 Bl.